

New spillway at the Esch-sur-Sûre Dam – Luxembourg

By Philippe Lazaro, Guy Toussin, Gilles Didier and Sébastien Ericum

Abstract

The 50 m high arch dam of Esch-sur-Sûre, built on the River Sûre between 1956 and 1957, is located 1.2 km upstream of the town of Esch-sur-Sûre in the north west of Luxembourg (district of Diekirch). The catchment area of the dam is 430 km² and the reservoir has a total storage capacity of 59 Mm³, is mainly used for water supply, power generation, flood control, flow regulation and recreational activities.

The dam is not equipped with a surface spillway. Floods are currently discharged using two gated bottom outlets, with a max. capacity of 225 m³/s each. This capacity is not sufficient to meet current flood safety requirements. The risk of a gate failure or an inadequate gate operation leading to an artificial flood result in rather unsatisfactory conditions of the current flood management.

Consequently, the construction of a new surface spillway was considered necessary.

The design of the spillway should:

1. fulfil the dam hydraulic safety requirements according to modern standards and in particular to guarantee the evacuation of the 10,000 year return period flood of 650 m³/s assuming that one outlet fails to operate (n-1 condition);
2. improve flood detention of the reservoir;
3. improve flood protection at the town of Esch-sur-Sûre.

The study of various alternatives finally led to a new spillway design, which consists of building two labyrinth weirs discharging into a spillway tunnel passing under the left dam abutment. The design discharge of the new spillway is 400 m³/s.

The increase of the total discharge capacity allows the maximum water level of the reservoir to be raised by 1 m in order to increase the flood detention capacity by approximately 3.5 Mm³. Therefore, more than 35% of the reservoir capacity will be allocated for flood mitigation during the winter (floods period).

The feasibility project will be submitted to the authorities for approval by the end of 2007 and the go ahead is expected in the near future.

Die neue Hochwasserentlastung der Staumauer Esch-sur-Sûre - Luxemburg

Philippe Lazaro, Guy Toussin, Gilles Didier and Sébastien Erpicum

Summary - Zusammenfassung

Die 50 m hohe Staumauer Esch-sur-Sûre, die in den Jahren 1956 und 1957 auf den Fluss Sûre erstellt wurde, befindet sich etwa 1.2 km flussaufwärts des Dorfes Esch-sur-Sûre in der nord-westlichen Region von Luxemburg (Landkreis von Dietrich). Die Talsperre weist ein Einzugsgebiet von 430 km² auf, während das Speichervolumen von 59 Mio m³ für vielfältige Ziele verwendet wird: Wasserversorgung, Energieerzeugung, Hochwasserschutz, Flussregulation sowie Freizeit (Wassersports).

Beim Bau der Staumauer wurde keine Hochwasserüberlauf vorgesehen. Deswegen, Hochwassern werden heute mit den zwei Grundablässen, je mit einem maximalen Abfluss von 225 m³/s abgeleitet. Diese Kapazität ist jedoch ungenügend, um die aktuellen Hochwassersicherheitskriterien zu erfüllen. Wegen des Risikos eines Ausfallens der Entlastungsorgane oder der Erzeugung einer Flutwellen infolge einer falschen Manövrierung der Grundablassschützen, sind die aktuellen Betriebsbedingungen unbefriedigend.

Um die Hochwassersicherheit zu verbessern, ist die Erstellung einer neuen Überlaufschwelle vorgesehen, mit welcher folgende Hauptziele angestrebt werden:

1. die Erfüllung der aktuellen Regelungen betreffend der Hochwassersicherheit, welche die Abführung eines 1000-jährige Hochwassers von 650 m³/s auch unter der Annahme, dass eine Entlastungsorgane ausser Betrieb sei („n-1“ Regel), verlangen;
2. die Verbesserung der Hochwassersicherheit;
3. die Erhöhung der Sicherheit gegen eine Überschwemmung des Dorfes von Esch-sur-Sûre.

Nach Überprüfung von verschiedenen Varianten, wurde die Erstellung einer neuen Hochwasserentlastung entschieden. Das projektierte Bauwerk besteht aus zwei Labyrinthwehren, von welchen das Wasser in einen Entlastungstunnel unter den linken Staumauerwiderlager abführt wird. Der Bemessungsabfluss der neuen Hochwasserentlastung beträgt 400 m³/s.

Die Zunahme der Entlastungskapazität erlaubt eine Erhöhung von 1 m des maximalen Wasserspiegels, indem der Hochwasserrückhalteraum von etwa 3.5 Mio m³ vergrößert wird.

Mehr als 35% des Beckenvolumens kann somit für Hochwasserdämpfung während der Wintermonaten benützt werden (Hochwasserperiode).

Es ist vorgesehen, die Machbarkeitsstudie am Ende 2007 der Behörden zur Genehmigung einzureichen, damit das Projekt in den nächsten Jahren realisiert werden kann.

1 Introduction

The Esch-sur-Sûre arch dam, designed by the french engineer Coyne, was built between 1956 and 1957 on the river Sûre, 1.2 km upstream of the small town Esch-sur-Sûre in the district of Dierkirch in the north west of Luxembourg. It's maximum height is 50 m and the crest is 170 m long between the two massive buttresses which constitute the abutments of the arch. The design of the dam was particularly bold (**Figure 1**) with the purpose to minimize the volume of concrete. Thus, the thickness of the arch is only 1.50 m at the crest and 4.50 at the base. The crest, which is constituted of prefabricated elements anchored to the dam, include two lanes road.

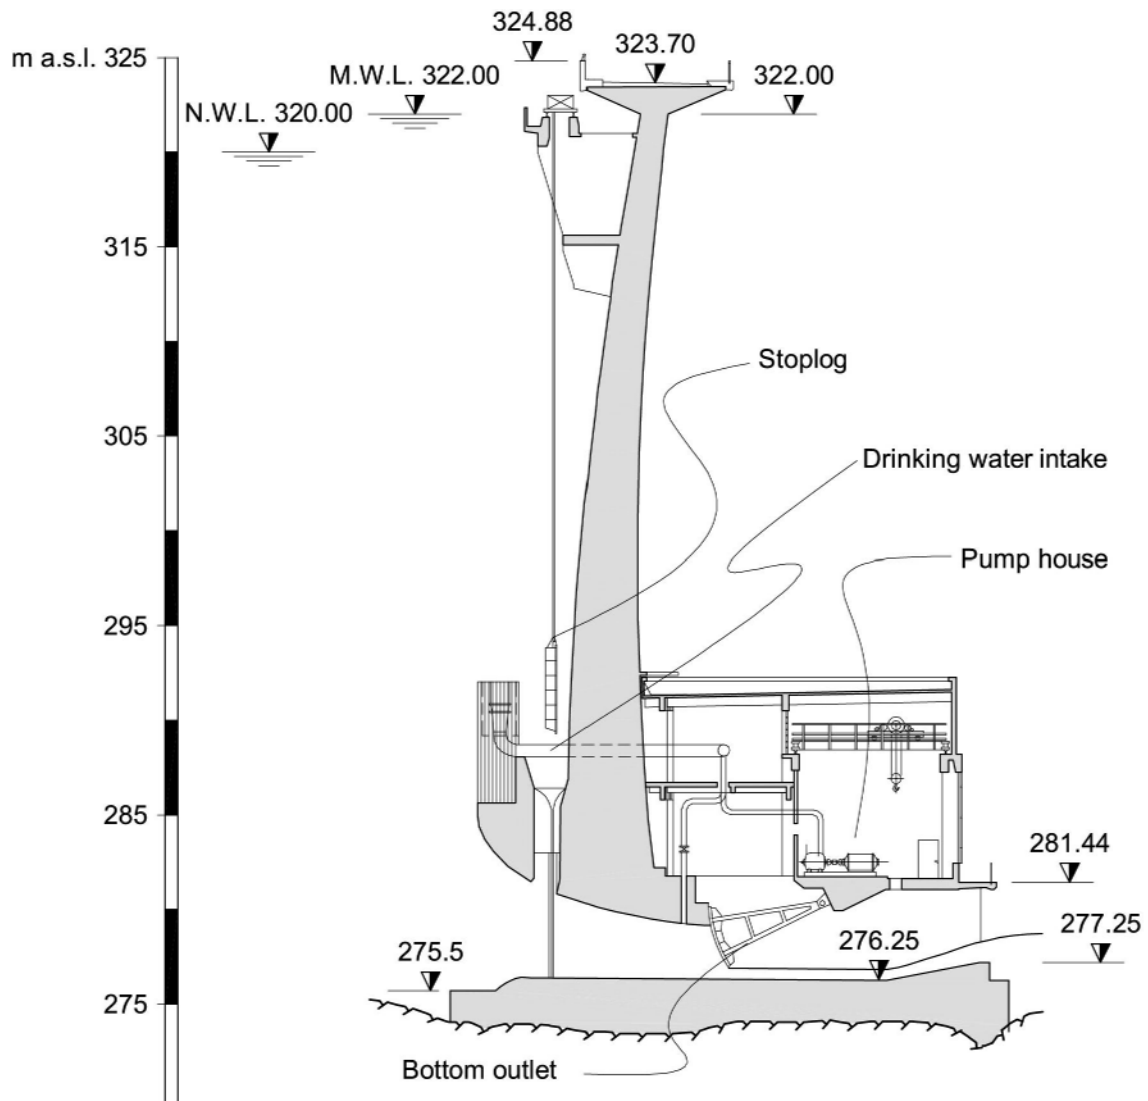


Figure 1: Central cross section of the Esch-sur-Sûre Dam.

The small dams located downstream of the Esch-sur-Sûre Dam provide a sound regulation of the river discharge and an appropriate control of the water level at the town of Esch-sur-Sûre in normal conditions.

The dam foundation is mainly constituted of hard and sound Schist and Quartzitic Sandstone of Devonian age.

The drainage area at Esch-sur-Sûre amounts to approx 428 km², two third of which in Belgium. The dam impounds a reservoir of approx. 59 Mm³ (total storage capacity), which is mainly used for drinking water, flood protection, flow regulation during the dry season, power generation and for touristic and recreational activities.

The reservoir is approx. 19 km long and its surface is 3.50 km². The dams of Pont Misère and Bavigne, located at the reservoir tail, allow the upstream water level to be maintained above a minimum level to preserve the site (environmental and touristic aspects).

The powerhouse, located at the toe of the dam, is equipped with two 5 MW Francis units with a total discharge of 25 m³/s. The average annual energy generation is approx. 16 GWh/year.

Currently, floods are evacuated downstream of the dam through the two bottom outlets located at the central cantilever (**Figure 1**), noting that the dam is not equipped with a surface spillway. The bottom outlets are controlled by two 3.50 m wide and 2.75 m high radial gates with a total capacity of 450 m³/s. The current discharge capacity of the dam is not sufficient to meet the updated flood safety requirements, in particular in case when one or both gates could fail to open during the flood due to power failure, gate jamming or human error.

The flood control volume between el. 320.0 m a.s.l. (N.W.L.) and 322.0 m a.s.l. (M.W.L.) amounts to approx. 7 Mm³. During winter, the normal water level is lowered by 3 m in order to increase the flood control capacity by 9 Mm³ and to improve the dam safety. Hence, 35% of the reservoir capacity is reserved for flood mitigation during the winter months.

The hydrologic regime of the River Sûre shows regularly decreasing discharge during the summer and very high values during the winter. The largest floods occur mainly in January and they are characterized by large incoming volumes, peak discharges and long durations. Three significant floods, with return period of up to 50 years, were observed during the period 1990 to 1995.

Current reservoir operations during flooding have been established in order to meet dam safety requirements and to protect the town of Esch-sur-Sûre against dam overtopping. Therefore, the flood discharge evacuated downstream of the dam is limited to 95 m³/s as long as possible. This value corresponds to the maximum capacity of the river Sûre at the town of Esch-sur-Sûre. However, if the reservoir level reaches el. 320.0 m a.s.l. the outflow has to be increased significantly up to the total capacity of the bottom outlets (450 m³/s) in order to avoid the overtopping of the dam.

2 New spillway at the Esch-sur-Sûre dam

2.1 Foreword

The floods observed over the period 1990 to 1995 justified the review of the hydrological data of the River Sûre at the dam site and a reassessment of dam safety.

This analysis carried out in 1995, led to the conclusion that both the volume and the peak discharge of floods associated with different return periods have significantly increased. The main consequences are that the current discharge capacity of the dam is insufficient to cope

with current safety standards and that the town of Esch-sur-Sûre is threatened by frequent flooding.

Based on these conclusions, the Administration des Ponts et Chaussées appointed Lombardi Engineering Ltd to carry out prefeasibility and feasibility studies for a new surface spillway at the dam and for a flood relief tunnel bypassing the town of Esch-sur-Sûre (**Figure 2**) [1]. In fact, although the dam rehabilitation project provide a better flood routing effect and therefore a reduction in the flow, it is still insufficient to ensure adequate flood protection of the town.

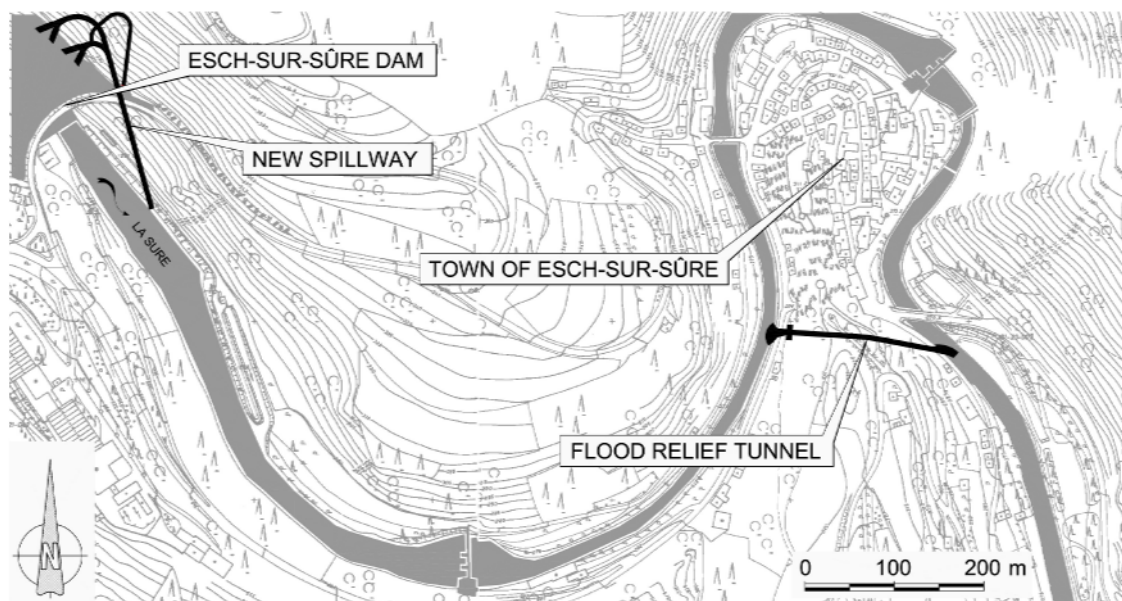


Figure 2. General layout of the new spillway at the Esch-sur-Sûre Dam and the flood relief tunnel in the town of Esch-sur-Sûre.

In this configuration, the new spillway will safely evacuate flood discharges through a tunnel passing under the left abutment of the dam, while the 142 m long flood relief tunnel, bypassing the town of Esch-sur-Sûre, will increase the global capacity of the river across the meander.

2.1 Main project features

The total capacity of the dam has to be increased significantly to match flood safety requirements. Moreover, the dam is not equipped with a surface spillway (flood safety concern). As a result, the construction of an uncontrolled surface spillway was considered necessary.


The spillway is constituted of two 37.5 m long labyrinth weirs located on the left abutment close to the dam. The labyrinth optimized geometry allows to minimize the volume of

excavation and therefore to reduce the visual impact of project. The crest of the weirs is situated at el. 320.70 m a.s.l., that is to say 70 cm above the current N.W.L. The spillway, designed to evacuate the 10'000 year return period flood of 650 m³/s considering a single bottom outlet in operation (250 m³/s) and the reservoir at the M.W.L. (323.00 m a.s.l.), will be equipped with a debris boom to keep the floating debris off its crest. The spilled water is discharged downstream of the dam through a gallery passing under the abutment. The junction of the two labyrinth weirs is located at the top of the inclined shaft. Both the headrace and the tailrace tunnels have the same dimensions (B x H = 6.15 m x 6.40 m) and are lined with concrete to ensure good flow conditions and to avoid erosion damage. The circular inclined shaft, which has an internal diameter of 6.15 m, is also lined with concrete. The asymmetrical flip bucket has been designed to ensure good flow restitution conditions to the river in all operation conditions. More detail regarding the hydraulic design of the spillway and physical model investigation are given hereafter.


The increase in the total discharge capacity will allow the maximum water level to be raised by 1 m up to el. 323.0 m a.s.l. in order to increase the flood protection capacity by approx. 3.5 Mm³. Both the increase of the spillway capacity and the rise of the maximum water level will lead to a reduction of the peak outflow discharges during severe floods, thus contributing to flood protection of the towns downstream of the dam.

The design of the new spillway meets the following requirements:

1. guaranteeing the operational safety of the spillway;
2. avoiding any loss of agriculture surfaces;
3. avoiding the loss of power generation capacity and drinking water;
4. limiting visible structures (mitigation of environmental impacts).

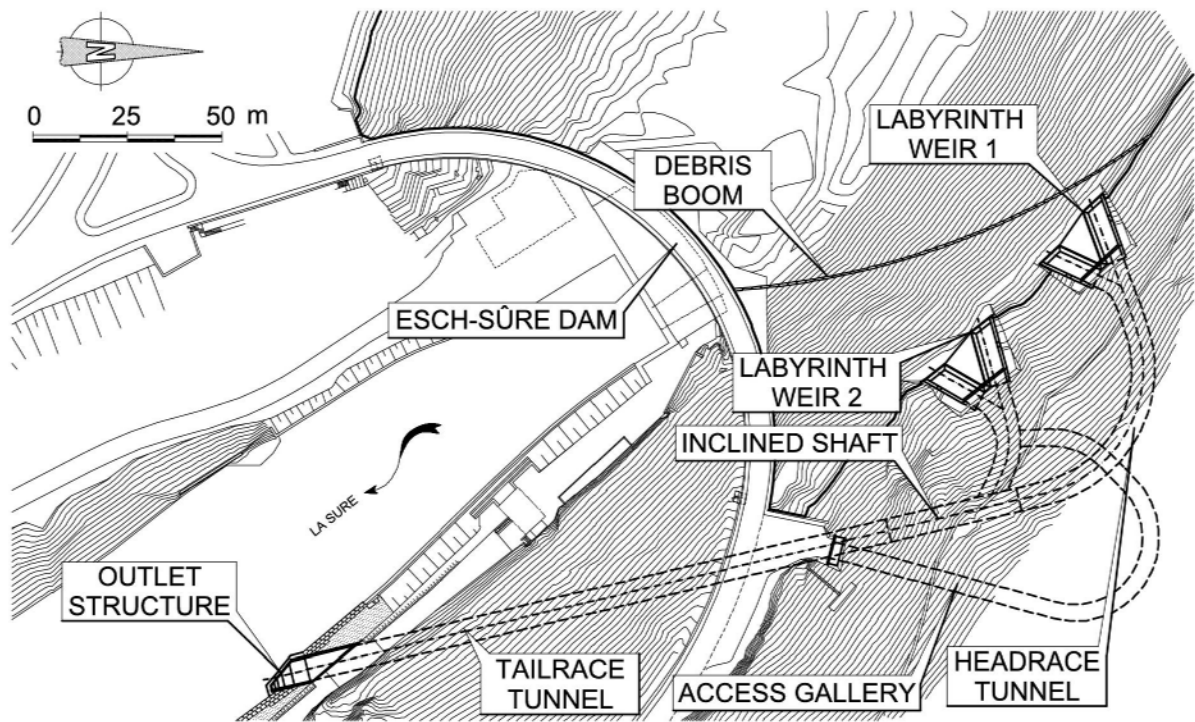

a)

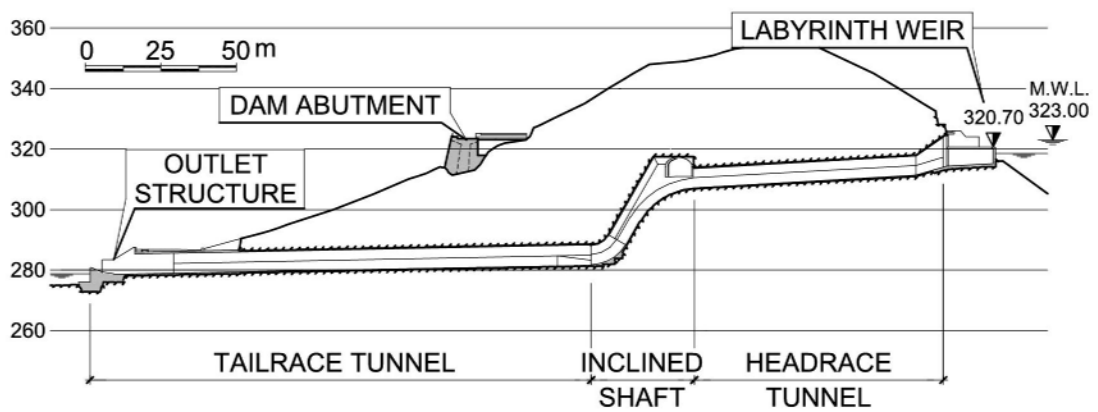

b)

Figure 2. General layout and longitudinal section of the new spillway at the Esch-sur-Sûre dam.

2.2 Physical model investigation

The hydraulic behavior of the new spillway has been tested at the Laboratory of Hydraulic Constructions of the University of Liege using a physical model downscaled at 1:26.19 (Froude similarity). The main goals of this physical investigations were to validate the discharge capacity of the design, to assess the flow characteristics inside the galleries and the shaft for all the operation conditions and to improve the ski jump design regarding scouring risks in the downstream natural river bed.

Characteristics of the physical model

The model represented a part of both the upstream reservoir and the downstream natural river, linked together by the complementary spillway structure. The projected geometry of the galleries and the shaft has been built with very slight geometric simplifications, using mainly plastic transparent materials. In particular, the complex transition from rectangular to circular section has been manufactured using the stereolithography (rapid prototyping method). This technique provides quick and accurate representation of any complex 3D shape.

At the downstream of the ski jump, the natural river bed has been modeled with movable granular coarse materials (7-14 or 14-20 mm) to allow a qualitative study of the scouring effects due to flood releases.

The upstream boundary condition was the flood discharge, measured with an electromagnetic flow meter, and the downstream boundary condition was the water level regulated by a moving sill. An additional discharge representing the bottom outlets could also be injected in the downstream river. The model was equipped with several measurement devices to control the flow parameters.

Discharge capacity and inner flow condition

The discharges from 51 to 512 m³/s have been injected in the model to assess the efficiency of the labyrinth sills and to evaluate the evacuation capacity of the galleries and the shaft.

For these tests, the discharge coefficient for both sills increased from 0.409 for 51 m³/s up to 0.428 for 151 m³/s. It decreased then to 0.382 for 512 m³/s. The labyrinth sills behaved thus very well. They were able to release the flood discharge of 400 m³/s for a reservoir elevation lower than the M.W.L. (323.0 m a.s.l.).

Regarding the galleries and the shaft, their dimensions needed to be increased to allow the release of the design discharge under free surface flow conditions. In order to take these geometric modifications into account, only the scale ratio of the model has been modified

from 1:26.19 to 1:29.33. The shaft has been shortened to fulfill the global chute requirements.

Important banking effects have been observed in the curved galleries, with the observation of small shock waves for the smaller discharges. Nevertheless, the flow in the shaft was always satisfactory, i.e. free surface one, thanks to an anti-clockwise rotation of the flow initiated by the interaction between the jets from the two upstream galleries.

Ski jump design

Initially, the ski jump resulted with a rise in the topography of the downstream gallery. This step, equal to 2.19 m, prevented the gallery to be flooded for high water levels in the river when the two bottom outlets were opened. It produced also important energy dissipation for high discharge through the spillway. For discharges through the spillway below 100 m³/s, a hydraulic jump was established in the gallery. For higher floods, the ski jump behaved well but the downstream jet was falling close to the river left bank.

A new geometry has been designed in order to prevent any hydraulic jump upstream of the structure and to move the falling jet away from the river left bank. To avoid any flooding of the gallery for high water levels in the river, the lowest point of the structure has also been raised and in parallel the shaft was shortened. The best solution consisted in a non symmetrical ski jump design regarding the gallery axis: the highest point of the flip bucket was on the left side in order to turn the jet away from the river bank and the lowest point, on the right side, allowed the release of small discharges without the formation of any hydraulic jump.

The shape and the levels of the ski jump have been refined to reach the better compromise between energy dissipation, scouring location and small discharges release. Finally, the flip bucket height was 4 m on the left side and 50 cm on the right side with a radius of 15 m.

2.3 Work schedule

The construction of the new spillway is scheduled to be completed within a period of 17 months. The initial construction activities include the construction of two cofferdams during the dry season. The first one in the reservoir upstream of the labyrinth weirs and the second one at the toe of the dam close to the outlet structure. Thus, the excavation and the concreting works can be performed with a full reservoir during the flood period. Afterwards, a short access tunnel to the headrace tunnel and to the labyrinth weirs will be excavated. This tunnel will be used for inspection and maintenance works once the spillway completed. The excavation will be carried out by means of roadheader and not by drilling and blasting in

order to protect the dam body against any eventual damage. The tailrace tunnel and the outlet structure will be executed directly from the dam toe.

3 Conclusion

The construction of new spillway at the Esch-sur-Sûre dam will increase significantly its discharge capacity in compliance with current flood safety requirements. It will also help to protect the towns downstream against flooding by reducing the peak outflow with respect to the current situation.

Although the dam rehabilitation project allows an increase in the flood routing effect and therefore a reduction of the outflow, it is still insufficient to ensure adequate flood protection to the town of Esch-sur-Sûre, which is located 1.2 km downstream of the dam. So, the project also includes the construction of a flood relief tunnel bypassing the town, which will increase the global capacity of the river reach at the vicinity of the town.

Literature:

- [1] Lazaro Ph.; Toussin G.: Flood relief project at Esch-sur-Sûre. 3rd International Symposium on Integrated Water Resources Management - Bochum, Germany 2006.

Authors Name and Affiliation:

Philippe Lazaro, Dip. Civil Eng. EPFL

Lombardi Engineering Ltd

Chief Hydraulic Engineer

Via R. Simen 19

6648 Minusio-Locarno

Switzerland

philippe.lazaro@lombardi.ch

Guy Toussin, Dip. Civil Eng

Division des Ouvrages d'Art, Administration des Ponts et Chaussées – Luxembourg

Head of the division

43, bd G.-D. Charlotte
2018 Luxembourg
Luxembourg
guy.toussin@pch.etat.lu

Gilles Didier, Dip. Civil Eng
Division des Ouvrages d'Art, Administration des Ponts et Chaussées – Luxembourg
Chief Civil Engineer
43, bd G.-D. Charlotte
2018 Luxembourg
Luxembourg
gilles.didier@pch.etat.lu

Sébastien Erpicum, Ph.D.
University of Liege – ArGEnCo – MS²F – HACH
Laboratory of Hydraulic Constructions
B52/3 – 1 Chemin des Chevreuils
4000 Liège
Belgium
s.erpicum@ulg.ac.be

List of figure captions

Figure 1: Central cross section of the Esch-sur-Sûre dam.

Figure 2. General layout of the new spillway at the Esch-sur-Sûre dam and the flood relief tunnel in the town of Esch-sur-Sûre.

Figure 3: General layout and longitudinal section of the new spillway at the Esch-sur-Sûre Dam.