

# Centimeter-scale secondary information on hydraulic conductivity using a hand-held air permeameter on borehole cores.


Rogiers, B.<sup>1,2\*</sup>, Winters, P.<sup>2</sup>, Huysmans, M.<sup>2</sup>, Beerten, K.<sup>1</sup>, Mallants, D.<sup>3</sup>, Gedeon, M.<sup>1</sup>, Batelaan, O.<sup>2,4</sup> & Dassargues, A.<sup>2,5</sup>

<sup>1</sup> Institute for Environment, Health and Safety, Belgian Nuclear Research Centre (SCK•CEN), Boeretang 200, BE-2400 Mol, Belgium. // <sup>2</sup> Dept. of Earth and Environmental Sciences, K.U.Leuven, Celestijnenlaan 200e - bus 2410, BE-3001 Heverlee, Belgium. // <sup>3</sup> Groundwater Hydrology Program, CSIRO Land and Water, Waite Road - Gate 4, Glen Osmond SA 5064, Australia. // <sup>4</sup> Dept. of Hydrology and Hydraulic Engineering, Vrije Universiteit Brussel, Pleinlaan 2, BE-1050 Brussels, Belgium. // <sup>5</sup> Hydrogeology and Environmental Geology, Dept. of Architecture, Geology, Environment and Civil Engineering (ArGenCo) and Aquapole, Université de Liège, B.52/3 Sart-Tilman, BE-4000 Liège, Belgium.

\*Corresponding author: brogiers@sckcen.be

## Introduction


- Saturated hydraulic conductivity ( $K_s$ )
  - is one of the most important parameters
  - determining groundwater flow and contaminant transport
  - in both unsaturated and saturated porous media
- Small-scale variability of  $K_s$  is key to obtain effective transport parameters and to explain  $K_s$  measurements or inverse estimates at the larger scale
- ~350 m of borehole core is available at Mol/Dessel, Belgium (Fig. 1; Beerten et al. 2010)
  - sediments of Miocene to Pleistocene age, marine to continental origin
  - sand to clayey sand with distinct clay lenses, with varying glauconite content
  - 2 samples each 2 meters with  $K_s$  from constant head permeameter tests in the lab
  - $K_s$  range of 7 orders of magnitude
- Thin slabs separated from the cores are analysed in this study (Fig. 1)

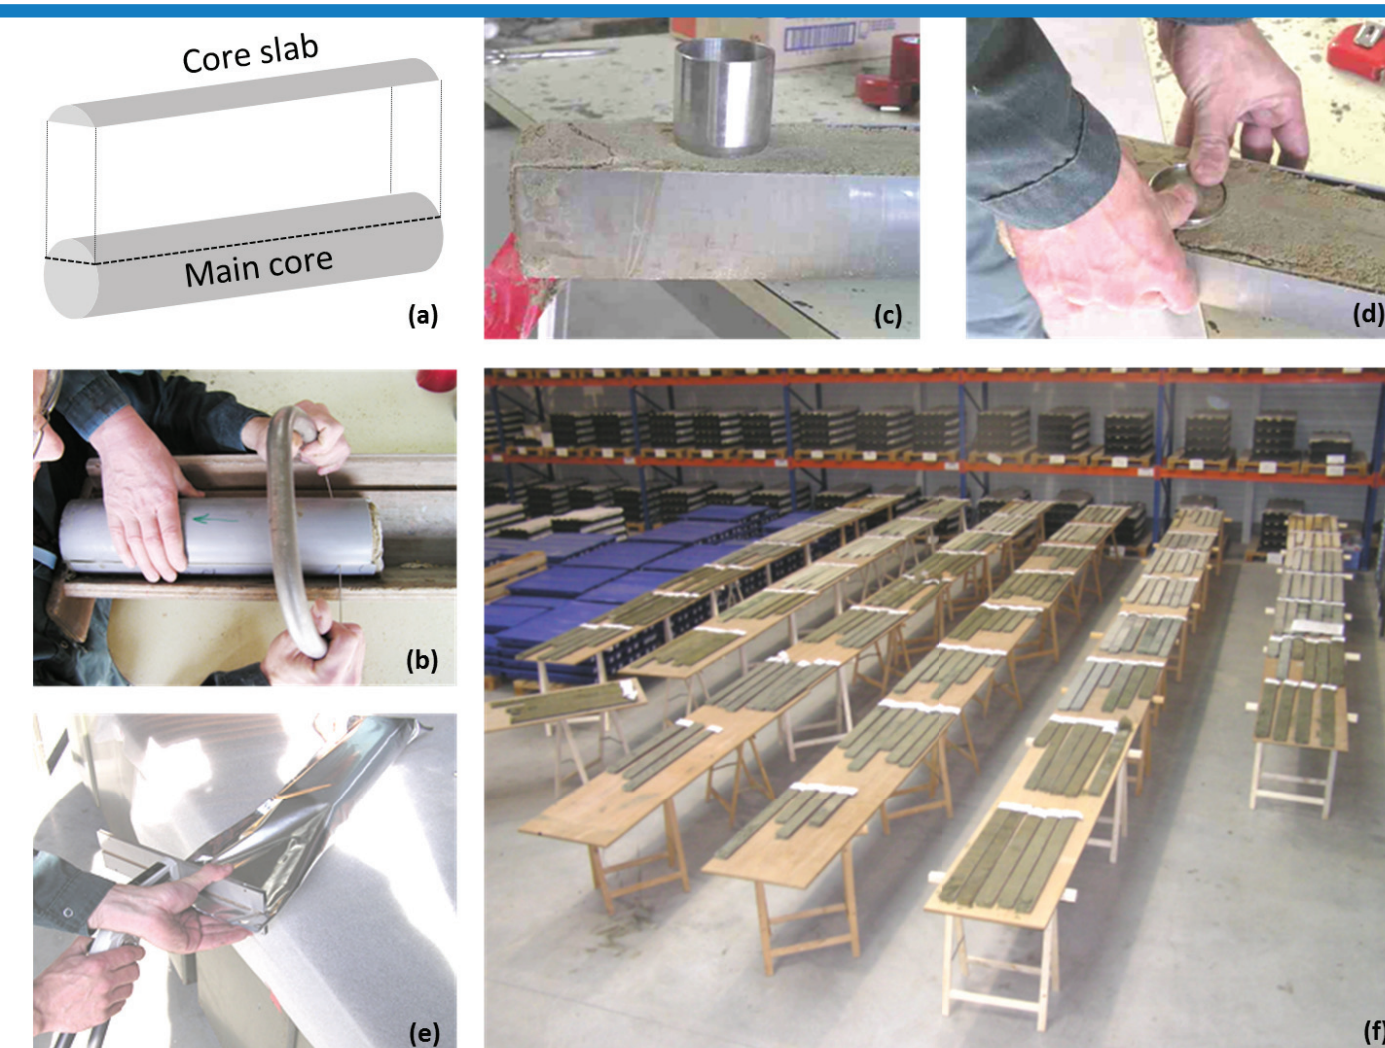


**Figure 1:** Core sampling at SCK•CEN: a) schematic of slab removal from main core, b) incision is made in main core to the appropriate depth for slab removal, c) 100 cm³ steel core for hydraulic conductivity determination in the lab, d) steel core inserted in core material, e) vacuum sealing of main core for long-term storage, f) display of core slabs for geological description.

## Methods


- Measurements
  - Use of the TinyPerm II hand-held air permeameter device (Fig. 2; New England Research & Vindum Engineering 2011)
  - > 5000 measurements on the dry borehole core slabs at 5 cm resolution, performed within 5 days (Figs. 3 & 6)
  - Equation of Loll et al. (1999) to convert air permeability to a  $K_s$  estimate, since perfect agreement between intrinsic permeability estimated from measurement of air and water flow cannot be expected
  - Additional measurements to quantify measurement error and operator influence (Fig. 4)
- Calibration with the lab  $K_s$  measurements with a linear mixed-effects model, with random effects for both the stratigraphy and borehole factors (Fig. 5)
- Spatial analysis
  - Variography for the lab measurements and air permeameter estimates after standardisation
  - Fitting an intrinsic model of co-regionalisation (Goovaerts 1997)
  - Interpolation of lab  $K_s$  data with air permeameter estimates as secondary variable
  - Leave-two-out cross-validation to quantify the predictive uncertainty on  $K_s$ , and the accuracy gain with using the secondary data (samples at a distance of about 10 cm are left out together)

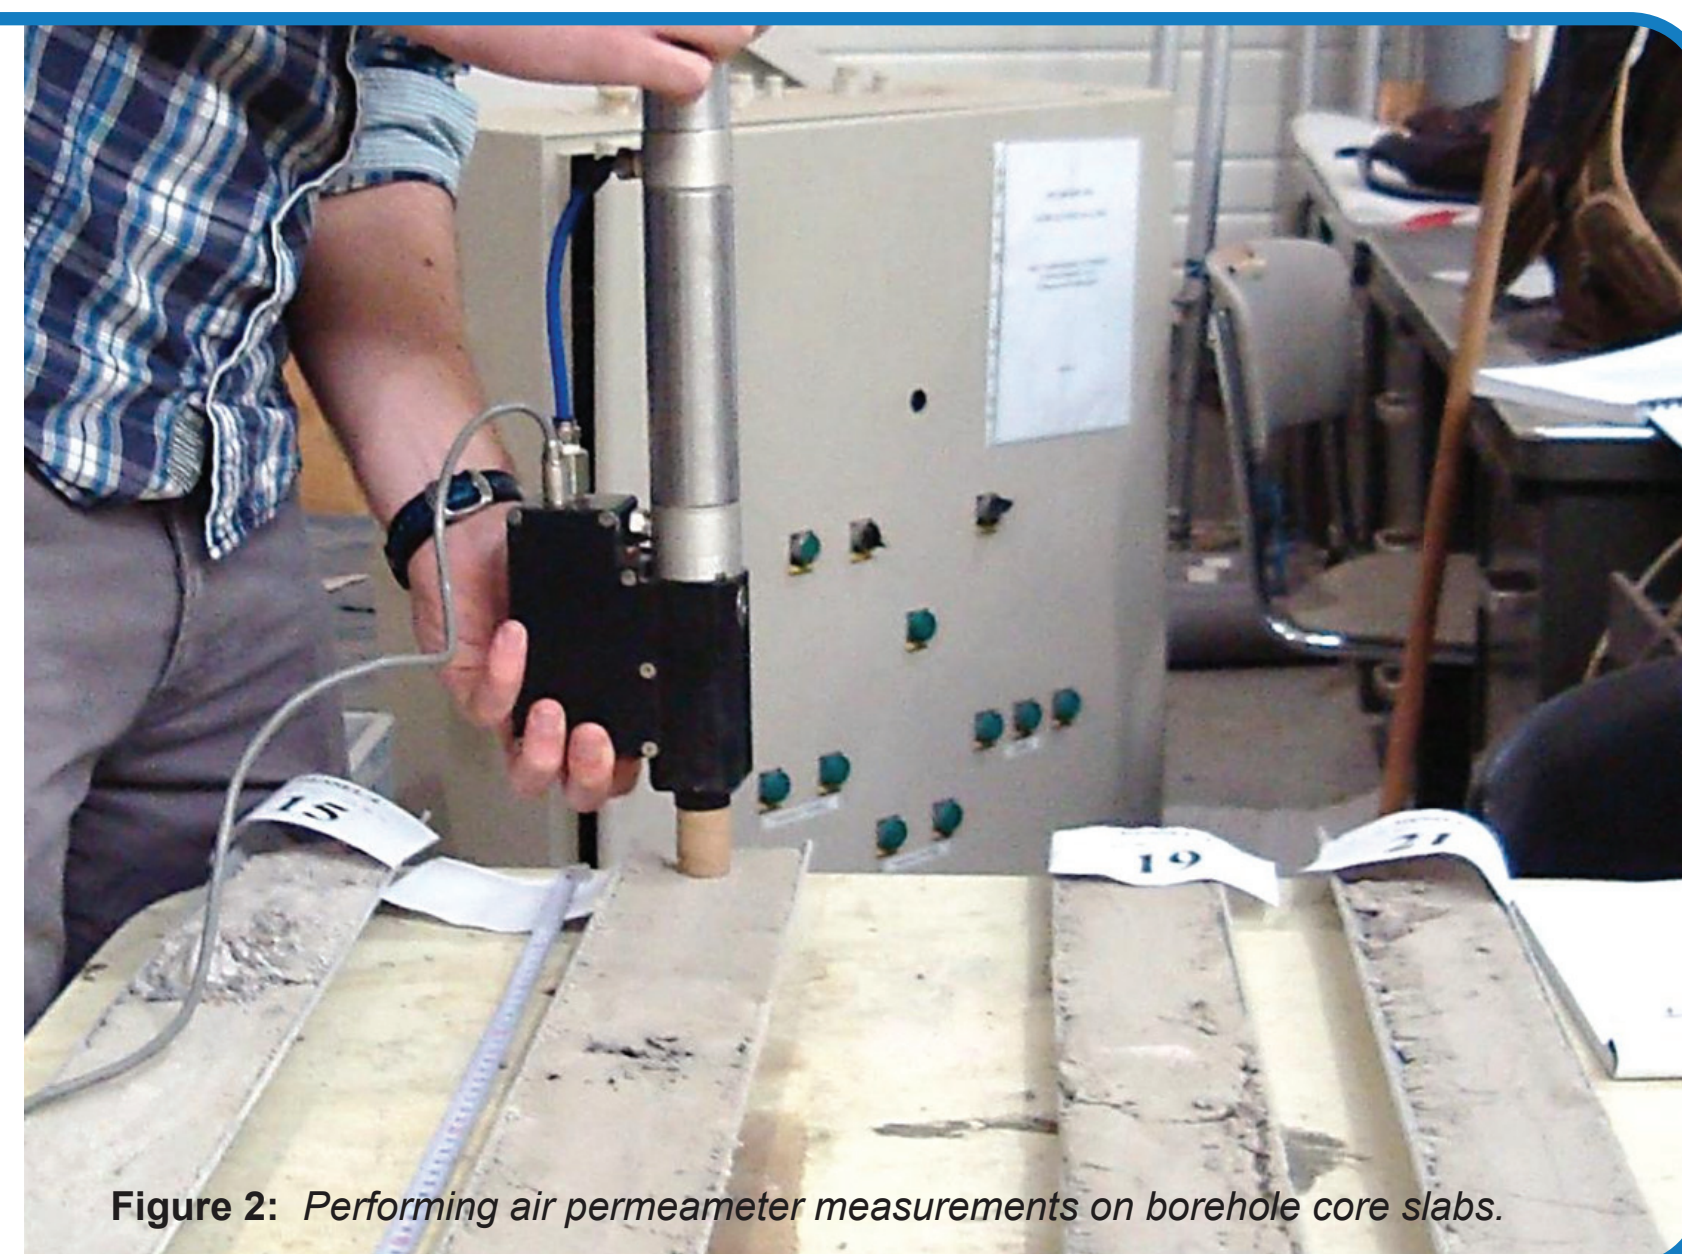


**Figure 2:** Performing air permeameter measurements on borehole core slabs.

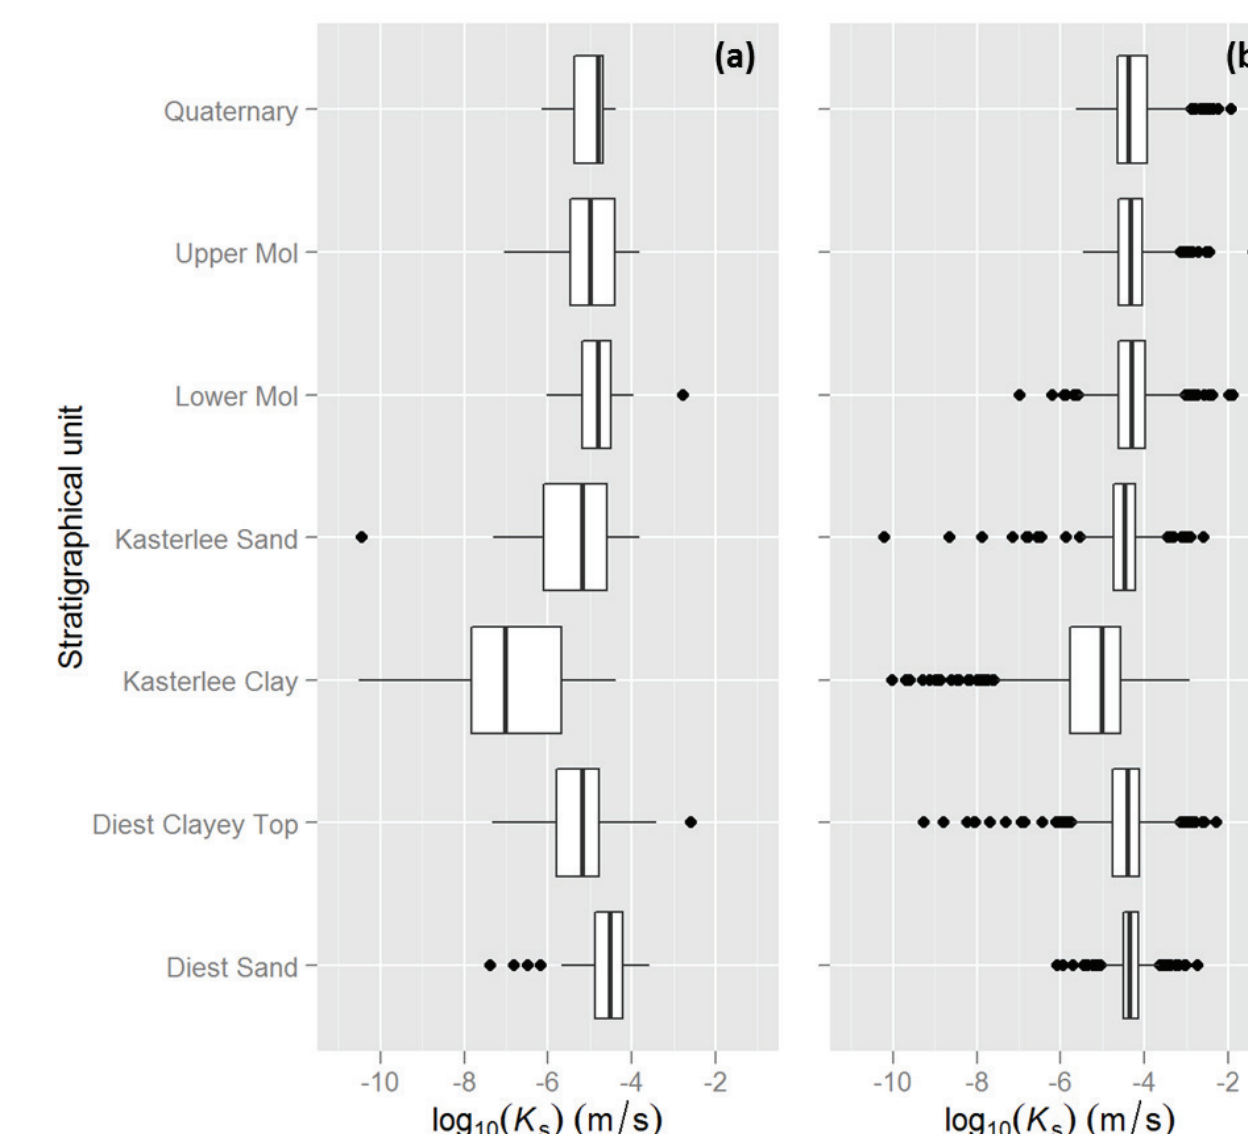


**Figure 3:** Boxplots of  $K_s$  values from a) the lab analysis, and b) the air permeameter  $K_s$  estimates (based on Loll et al., 1999), for each of the stratigraphical units. The whiskers extend to the most extreme data point that is no more than 1.5 times the interquartile range from the box.

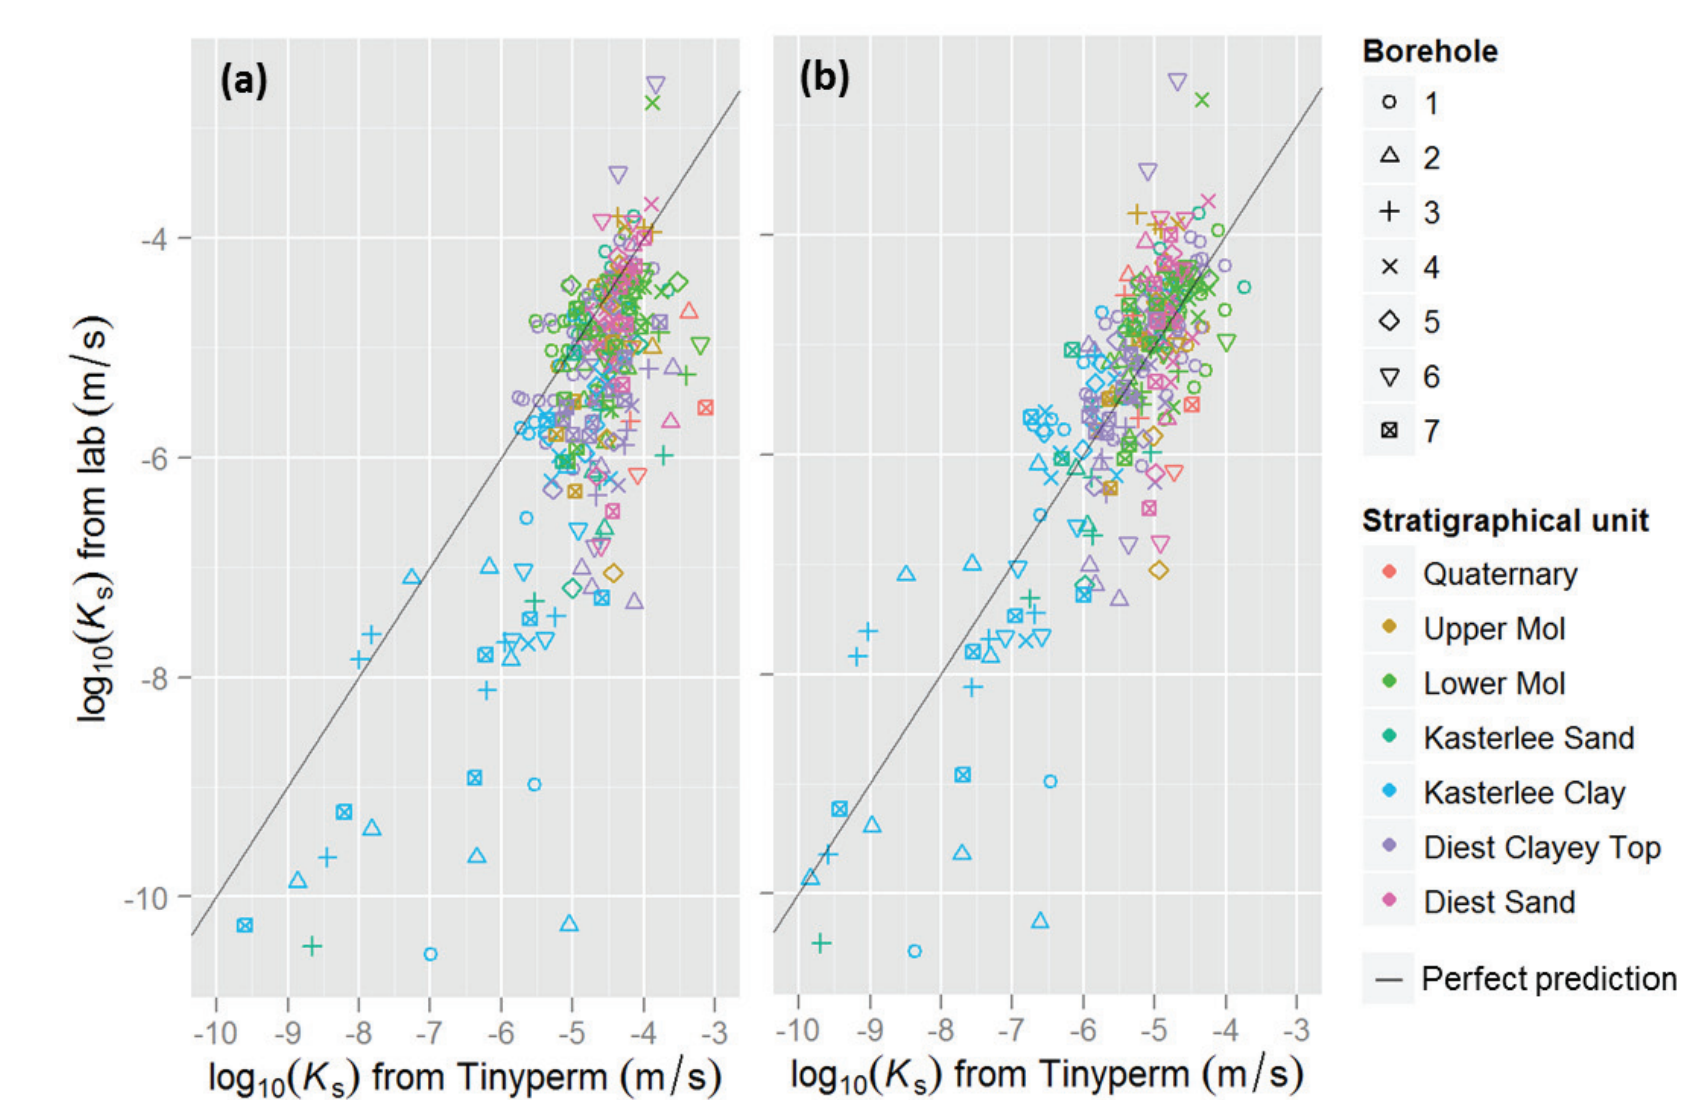

**Figure 5:** Calibration of the air permeameter  $K_s$  estimates (a: using Loll et al., 1999), with laboratory analyses data, by means of a linear mixed effects model with a random effect for each stratigraphical unit and each borehole (b).

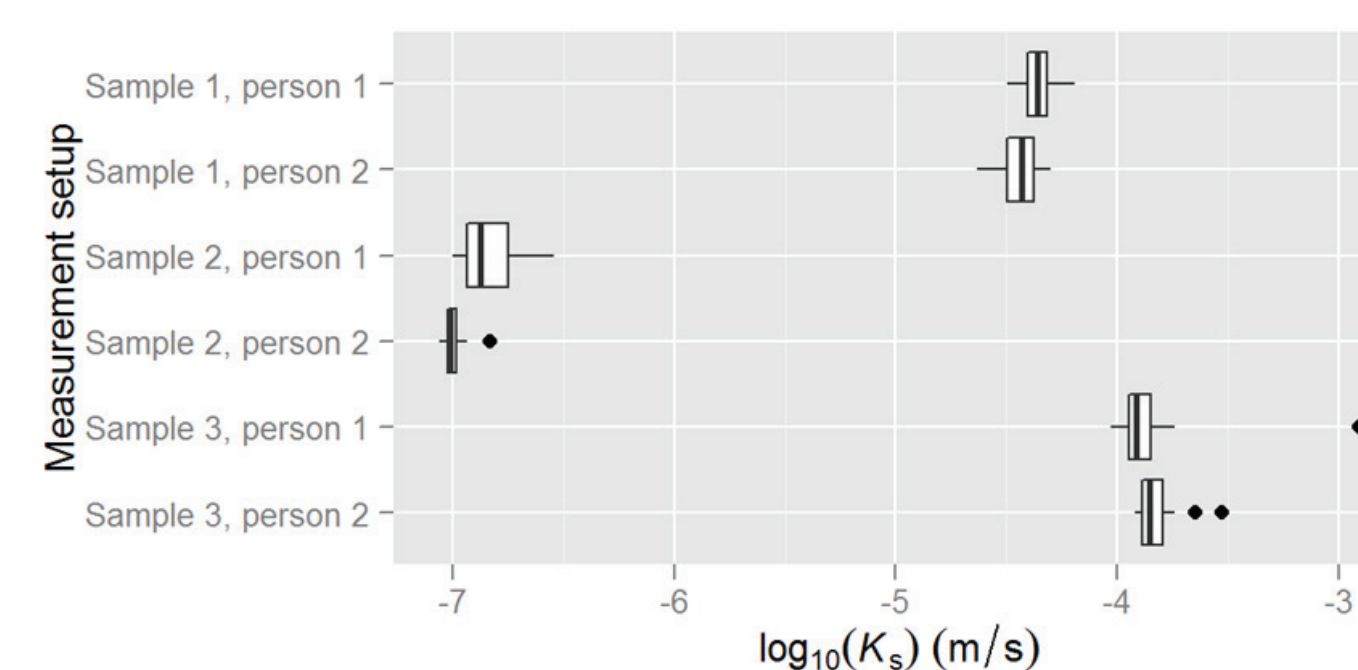


**Figure 4:** Repeated measurements and operator influence.

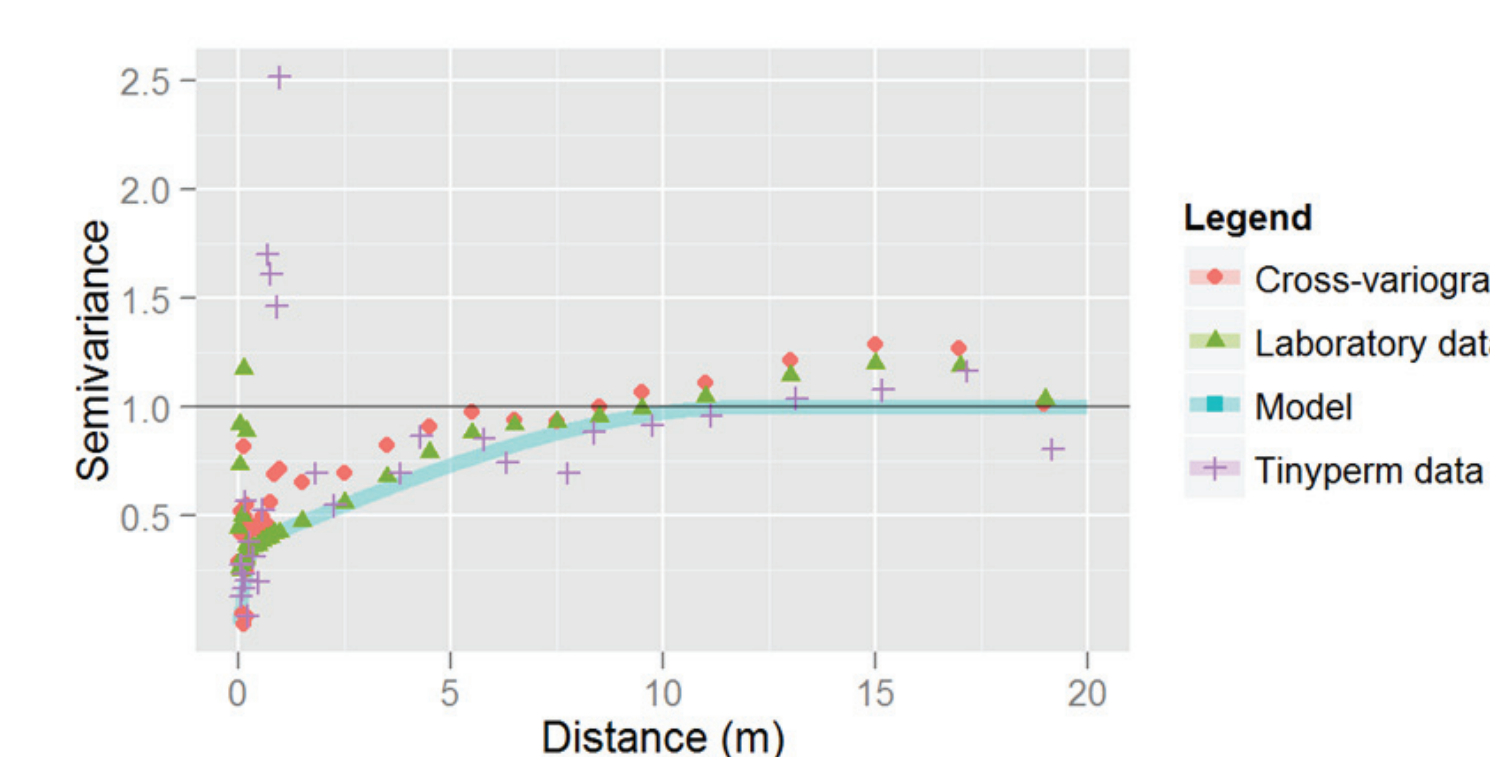


**Figure 6:** Experimental direct and cross-variograms of the standardised data, and the corresponding intrinsic model of coregionalisation, consisting of a short (0.4 m) and long range (12 m) spherical variogram model.

## Results

- The relative differences between the stratigraphical units corresponds to the lab analyses observations (Fig. 3)
- A systematic bias and smaller range of  $K_s$  values is predicted using the equation from Loll et al. (1999)
- Measurement error as well as the systematic bias introduced by the operator are small compared to the intrinsic  $K_s$  variability (compare Figs. 3 & 4)
- Correlation between lab measurements and air permeability estimates is 0.74 and increases after calibration to 0.84 (see Fig. 5)
- After standardisation of the data, an intrinsic model of coregionalisation was fitted to the experimental variograms with two nested spherical models (Fig. 6). One for the short range (0.4 m) and one for the long range (12 m).
- Predictions are presented on Fig. 7, and show a lot of small-scale heterogeneity, as well as clear zones of lower  $K_s$  values. In the zones for which core slabs were missing, important uncertainty remains, as indicated by the larger confidence intervals.
- Cross-validation results (see Fig. 8)
  - Performance kriging: MSE: 1.13; ME: 0.04;  $R^2$ : 0.31
  - Performance co-kriging: MSE: 0.79; ME: -0.02;  $R^2$ : 0.71
  - Especially the low  $K_s$  range predictions are improved

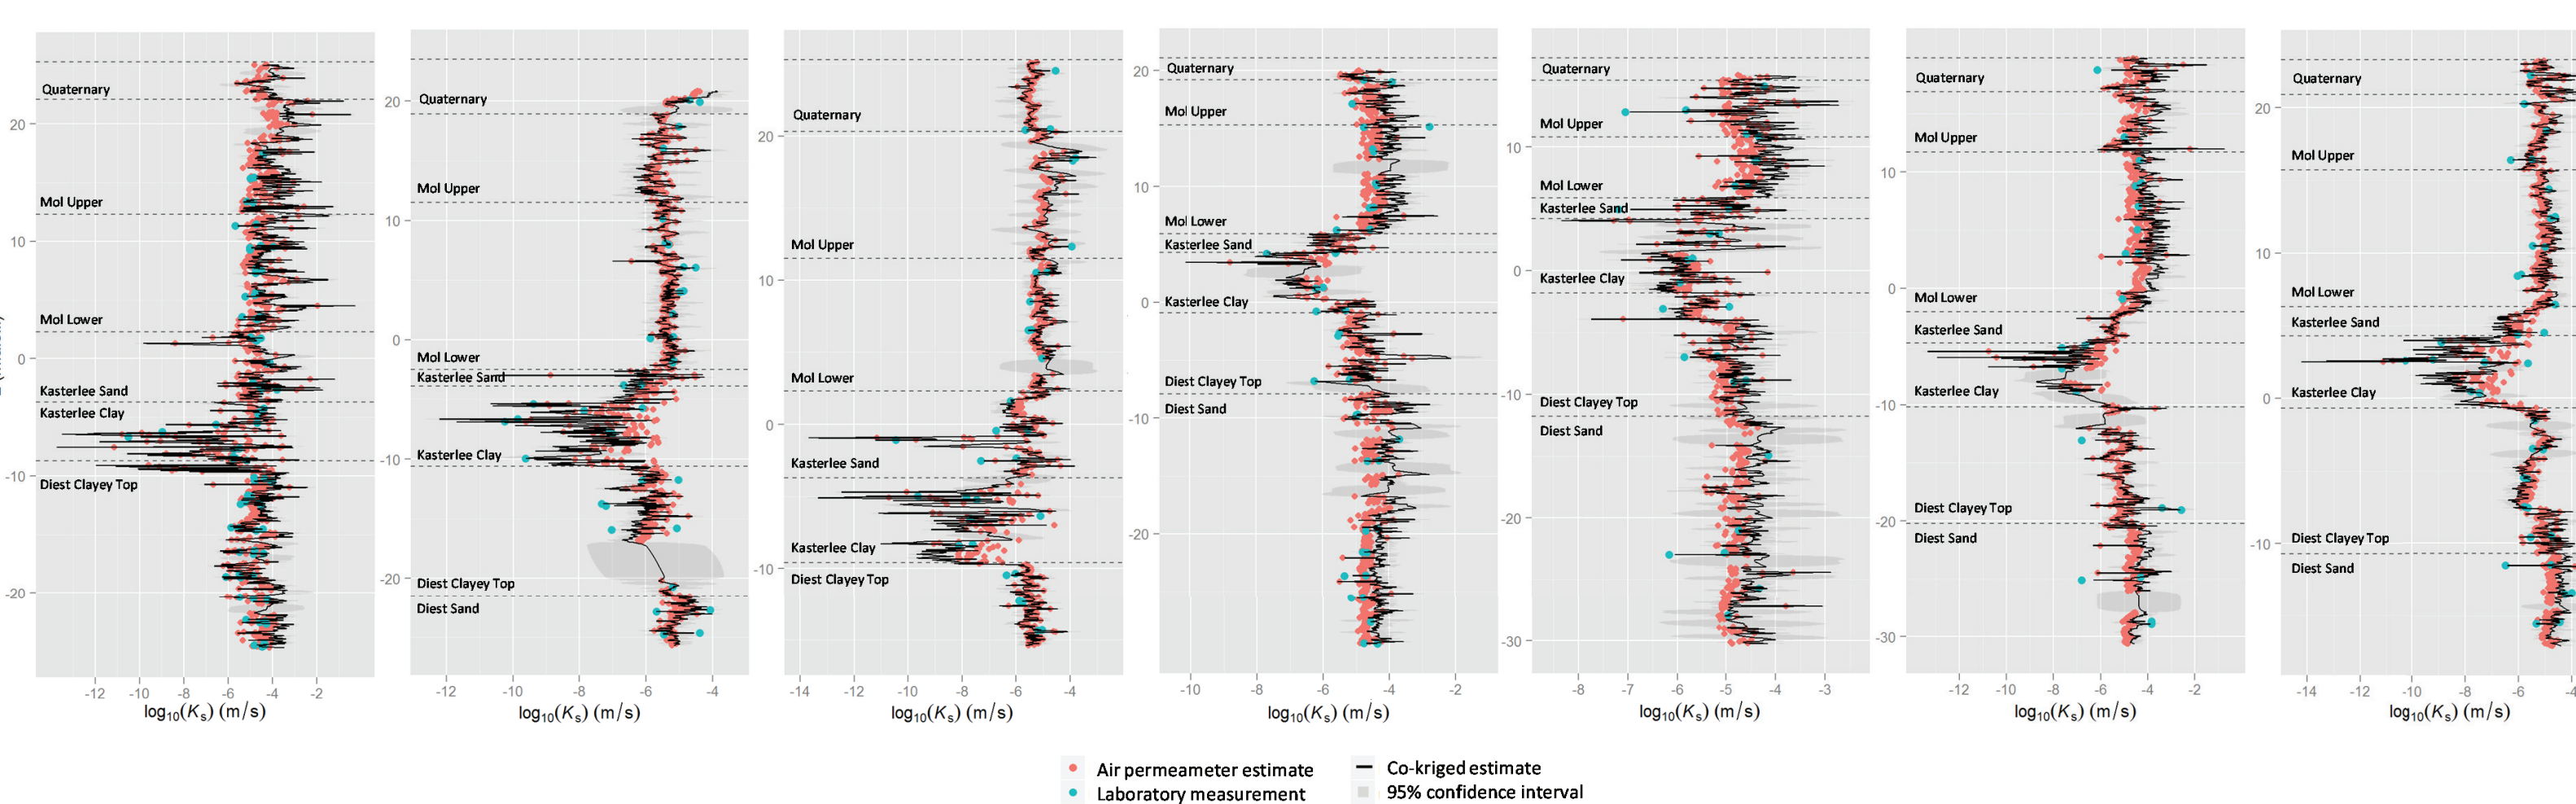

**Figure 7:** Vertical profiles of  $K_s$  values from the lab analyses, the air permeameter  $K_s$  estimates after calibration, and the cokriging estimates and 95% confidence interval.

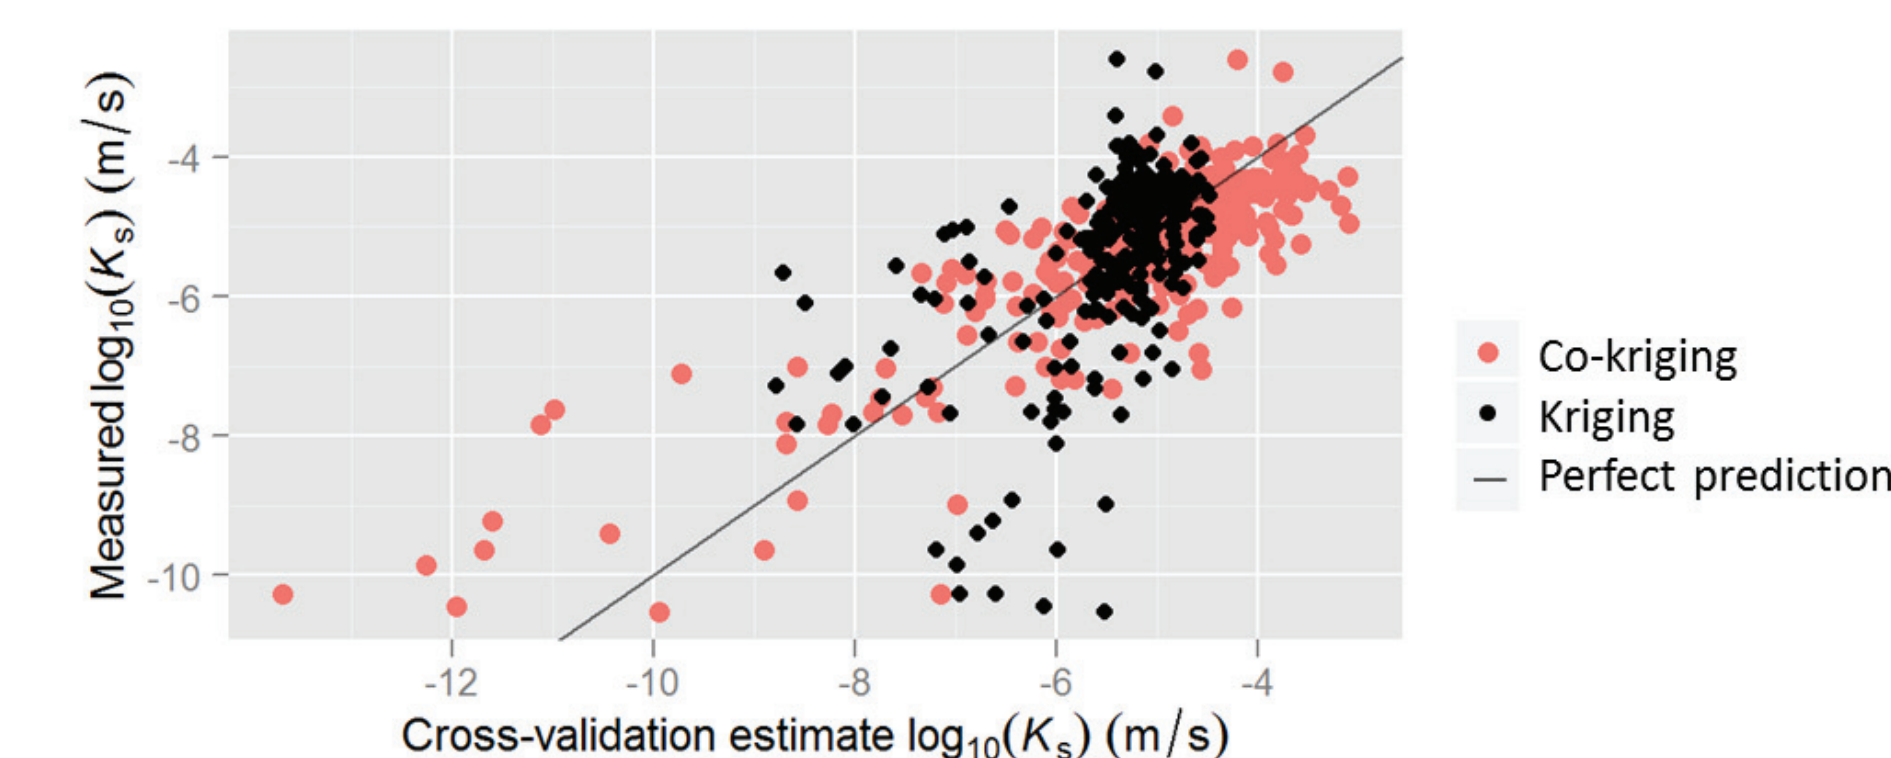

**Figure 8:** Leave-two-out cross-validation results for both kriging and co-kriging estimation.

## Conclusions

- Hand-held air permeameter measurements on undisturbed borehole cores provide a very cost-effective way to obtain high-resolution  $K_s$  data
- Even core slabs that have been lying open to air, and have been subject of several investigations during a few years, provide useful information
- Without calibration, reliable relative  $K_s$  estimates can be obtained, and equations from literature provide absolute  $K_s$  estimates (e.g. Loll et al. 1999)
- Calibration with laboratory measurements improves the accuracy, and is recommended for core slabs of this state

## Acknowledgements

The authors are grateful to ONDRAF/NIRAS, the Belgian Agency for Radioactive Waste and Enriched Fissile Materials, for providing the borehole cores and laboratory data. Findings and conclusions in this paper are those of the authors and do not necessarily represent the official position of ONDRAF/NIRAS. Serge Labat and Frans Slegers are acknowledged for their help with handling the borehole cores.

## References

- Beerten K., Wemaere I., Gedeon M., Labat S., Rogiers B., Mallants D., Salah S. & Leterme B. (2010). Geological, hydrogeological and hydrological data for the Dessel disposal site. Project near surface disposal of category A waste at Dessel – Version 1. - Brussels, Belgium: NIRAS/ONDRAF, 2010 - 273 p. - NIROND-TR 2009-05 E V1.
- Goovaerts, P. (1997). Geostatistics for Natural Resources Evaluation (Applied Geostatistics Series) (p. 496). Oxford University Press, USA.
- Loll, P., Moldrup, P., Schjønning, P., & Riley, H. (1999). Predicting saturated hydraulic conductivity from air permeability: Application in stochastic water infiltration modeling. Water resources research, 35(8), 2387–2400. American Geophysical Union.
- New England Research & Vindum Engineering (2011). TinyPerm II Portable Air Permeameter, User's Manual. Retrieved from <http://www.vindum.com/TinyPermManual.pdf> on 14-06-2011.