

# COMPUTING SYSTEM SIGNATURES THROUGH RELIABILITY FUNCTIONS

JEAN-LUC MARICHAL AND PIERRE MATHONET

ABSTRACT. It is known that the Barlow-Proschan index of a system with i.i.d. component lifetimes coincides with the Shapley value, a concept introduced earlier in cooperative game theory. Due to a result by Owen, this index can be computed efficiently by integrating the first derivatives of the reliability function of the system along the main diagonal of the unit hypercube. The Samaniego signature of such a system is another important index that can be computed for instance by Boland's formula, which requires the knowledge of every value of the associated structure function. We show how the signature can be computed more efficiently from the diagonal section of the reliability function via derivatives. We then apply our method to the computation of signatures for systems partitioned into disjoint modules with known signatures.

## 1. INTRODUCTION

Consider an  $n$ -component system  $([n], \phi)$ , where  $[n] = \{1, \dots, n\}$  is the set of its components and  $\phi: \{0, 1\}^n \rightarrow \{0, 1\}$  is its structure function (which expresses the state of the system in terms of the states of its components). We assume that the system is semicoherent, which means that  $\phi$  is nondecreasing in each variable and satisfies the conditions  $\phi(0, \dots, 0) = 0$  and  $\phi(1, \dots, 1) = 1$ . We also assume, unless otherwise stated, that the components have continuous and i.i.d. lifetimes  $T_1, \dots, T_n$ .

Barlow and Proschan [1] introduced in 1975 an index which measures an importance degree for each component. This index is defined by the  $n$ -tuple  $\mathbf{I}_{\text{BP}}$  whose  $k$ th coordinate ( $k \in [n]$ ) is the probability that the failure of component  $k$  causes the system to fail; that is,

$$I_{\text{BP}}^{(k)} = \Pr(T_S = T_k),$$

where  $T_S$  denotes the system lifetime. For continuous i.i.d. component lifetimes, this index reduces to the Shapley value [15, 16], a concept introduced earlier in cooperative game theory. In terms of the values  $\phi(A)$  ( $A \subseteq [n]$ ) of the structure function,<sup>1</sup> the probability  $I_{\text{BP}}^{(k)}$  then takes the form

$$(1) \quad I_{\text{BP}}^{(k)} = \sum_{A \subseteq [n] \setminus \{k\}} \frac{1}{n \binom{n-1}{|A|}} (\phi(A \cup \{k\}) - \phi(A)).$$

---

*Date:* November 17, 2012.

*2010 Mathematics Subject Classification.* 60K10, 62N05, 90B25.

*Key words and phrases.* System signature; reliability function; modular decomposition.

<sup>1</sup>As usual, we identify Boolean vectors  $\mathbf{x} \in \{0, 1\}^n$  and subsets  $A \subseteq [n]$  by setting  $x_i = 1$  if and only if  $i \in A$ . We thus use the same symbol to denote both a function  $f: \{0, 1\}^n \rightarrow \mathbb{R}$  and its corresponding set function  $f: 2^{[n]} \rightarrow \mathbb{R}$ , interchangeably.

The concept of *signature*, which reveals a strong analogy with that of Barlow-Proschan index above (see [7] for a recent comparative study), was introduced in 1985 by Samaniego [13, 14] as a useful tool for the analysis of theoretical behaviors of systems. The system signature is defined by the  $n$ -tuple  $\mathbf{s}$  whose  $k$ th coordinate  $s_k$  is the probability that the  $k$ th component failure causes the system to fail. That is,

$$s_k = \Pr(T_S = T_{k:n}),$$

where  $T_{k:n}$  denotes the  $k$ th smallest lifetime, i.e., the  $k$ th order statistic obtained by rearranging the variables  $T_1, \dots, T_n$  in ascending order of magnitude.

Boland [3] showed that  $s_k$  can be explicitly written in the form

$$(2) \quad s_k = \frac{1}{\binom{n}{n-k+1}} \sum_{\substack{A \subseteq [n] \\ |A|=n-k+1}} \phi(A) - \frac{1}{\binom{n}{n-k}} \sum_{\substack{A \subseteq [n] \\ |A|=n-k}} \phi(A).$$

Thus, just as for the Barlow-Proschan index, the signature does not depend on the distribution of the variables  $T_1, \dots, T_n$  but only on the structure function.

The computation of  $I_{\text{BP}}^{(k)}$  by means of (1) may be cumbersome and tedious since it requires the evaluation of  $\phi(A)$  for every  $A \subseteq [n]$ . To overcome this issue, Owen [10, 11] proposed to compute the right-hand expression in (1) only from the expression of  $\phi$  as a multilinear polynomial function as follows.

As a Boolean function,  $\phi$  can always be put in the unique multilinear form (i.e., of degree at most one in each variable)

$$\phi(\mathbf{x}) = \sum_{A \subseteq [n]} c(A) \prod_{i \in A} x_i,$$

where the link between the coefficients  $c(A)$  and the values  $\phi(A)$  is given through the conversion formulas (Möbius inversion)

$$c(A) = \sum_{B \subseteq A} (-1)^{|A|-|B|} \phi(B) \quad \text{and} \quad \phi(A) = \sum_{B \subseteq A} c(B).$$

Owen introduced the *multilinear extension* of  $\phi$  as the multilinear polynomial function  $\hat{\phi}: [0, 1]^n \rightarrow \mathbb{R}$  defined by

$$\hat{\phi}(\mathbf{x}) = \sum_{A \subseteq [n]} c(A) \prod_{i \in A} x_i.$$

**Example 1.** The structure of a system consisting of two components connected in parallel is given by

$$\phi(x_1, x_2) = \max(x_1, x_2) = x_1 \sqcup x_2 = x_1 + x_2 - x_1 x_2,$$

where  $\sqcup$  is the (associative) coproduct operation defined by  $x \sqcup y = 1 - (1-x)(1-y)$ . Considering only the multilinear expression of  $\phi$ , we immediately obtain the corresponding multilinear extension  $\hat{\phi}(x_1, x_2) = x_1 + x_2 - x_1 x_2$ .

In reliability analysis the function  $\hat{\phi}$ , denoted by  $h$ , is referred to as the *reliability function* of the structure  $\phi$  (see [2, Chap. 2]; see also [12, Section 3.2] for a recent reference). This is due to the fact that, under the i.i.d. assumption, we have

$$(3) \quad \bar{F}_S(t) = h(\bar{F}_1(t), \dots, \bar{F}_n(t)),$$

where  $\bar{F}_S(t) = \Pr(T_S > t)$  is the reliability of the system and  $\bar{F}_k(t) = \Pr(T_k > t)$  is the reliability of component  $k$  at time  $t$ .

We henceforth denote the function  $\hat{\phi}$  by  $h$ . Also, for any function  $f$  of  $n$  variables, we denote its diagonal section  $f(x, \dots, x)$  simply by  $f(x)$ .

Owen then observed that the  $k$ th coordinate of the Shapley value, and hence the  $k$ th coordinate of the Barlow-Proschan index, is also given by

$$(4) \quad I_{\text{BP}}^{(k)} = \int_0^1 (\partial_k \hat{\phi})(x) dx = \int_0^1 (\partial_k h)(x) dx.$$

That is,  $I_{\text{BP}}^{(k)}$  is obtained by integrating over  $[0, 1]$  the diagonal section of the  $k$ th partial derivative of  $h$ .

Thus, formula (4) provides a simple way to compute  $I_{\text{BP}}^{(k)}$  from the reliability function  $h$  (at least simpler than the use of (1)).

**Example 2.** Consider the bridge structure as indicated in Figure 1. The corresponding structure function and its reliability function are respectively given by

$$\phi(x_1, \dots, x_5) = x_1 x_4 \sqcup x_2 x_5 \sqcup x_1 x_3 x_5 \sqcup x_2 x_3 x_4$$

and

$$h(x_1, \dots, x_5) = x_1 x_4 + x_2 x_5 + x_1 x_3 x_5 + x_2 x_3 x_4 - x_1 x_2 x_3 x_4 - x_1 x_2 x_3 x_5 - x_1 x_2 x_4 x_5 - x_1 x_3 x_4 x_5 - x_2 x_3 x_4 x_5 + 2 x_1 x_2 x_3 x_4 x_5.$$

By using (4) we obtain  $\mathbf{I}_{\text{BP}} = (\frac{7}{30}, \frac{7}{30}, \frac{1}{15}, \frac{7}{30}, \frac{7}{30})$ . Indeed, we have for instance

$$I_{\text{BP}}^{(3)} = \int_0^1 (\partial_3 h)(x) dx = \int_0^1 (2x^2 - 4x^3 + 2x^4) dx = \frac{1}{15}.$$

□

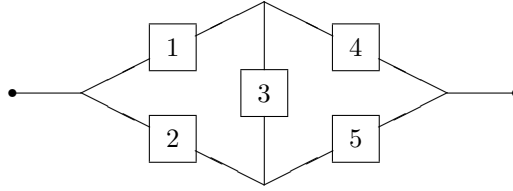


FIGURE 1. Bridge structure

*Remark 1.* Example 2 illustrates the fact that the reliability function  $h$  can be easily obtained from the minimal path sets<sup>2</sup> of the system simply by expanding the coproduct in  $\phi$  and simplifying the resulting algebraic expression (using  $x_i^2 = x_i$ ).

Similarly to Owen's method, in this note we provide a way to compute the signature of the system only from the reliability function of the structure, thus avoiding Boland's formula (2) which requires the evaluation of  $\phi(A)$  for every  $A \subseteq [n]$ .

Specifically, considering the *tail signature* of the system, that is, the  $(n+1)$ -tuple  $\bar{\mathbf{S}} = (\bar{S}_0, \dots, \bar{S}_n)$  defined by (see (2))

$$(5) \quad \bar{S}_k = \sum_{i=k+1}^n s_i = \frac{1}{\binom{n}{n-k}} \sum_{|A|=n-k} \phi(A),$$

<sup>2</sup>Recall that a subset  $P \subseteq [n]$  of components is a *path set* for the function  $\phi$  if  $\phi(P) = 1$ . A path set  $P \subseteq [n]$  is said to be *minimal* if it does not strictly contain another path set.

we prove (see Theorem 5 below) that the coefficient of  $(x-1)^k$  in the Taylor expansion about  $x=1$  of the polynomial

$$p(x) = x^n h(1/x)$$

(which is the  $n$ -reflected of the univariate polynomial  $h(x)$ ) is exactly  $\binom{n}{k} \bar{S}_k$ .<sup>3</sup> In other terms, we have

$$(6) \quad \bar{S}_k = \frac{(n-k)!}{n!} D^k p(1), \quad k = 0, \dots, n,$$

and the signature can be computed by

$$(7) \quad s_k = \bar{S}_{k-1} - \bar{S}_k, \quad k = 1, \dots, n.$$

Even though such a computation can be easily performed by hand for small  $n$ , a computer algebra system can be of great assistance for large  $n$ .

**Example 3.** Consider again the bridge structure as indicated in Figure 1. By identifying the variables  $x_1, \dots, x_5$  in  $h(x_1, \dots, x_5)$ , we immediately obtain

$$h(x) = 2x^2 + 2x^3 - 5x^4 + 2x^5,$$

from which we can compute

$$p(x) = x^5 h(1/x) = 2 - 5x + 2x^2 + 2x^3 = 1 + 5(x-1) + 8(x-1)^2 + 2(x-1)^3,$$

or equivalently,

$$p(x+1) = 1 + 5x + 8x^2 + 2x^3.$$

Using (6) we then easily obtain  $\bar{\mathbf{S}} = (1, 1, \frac{4}{5}, \frac{1}{5}, 0, 0)$ . Indeed, we have for instance  $\binom{5}{2} \bar{S}_2 = 8$  and hence  $\bar{S}_2 = 4/5$ . Finally, using (7) we obtain  $\mathbf{s} = (0, \frac{1}{5}, \frac{3}{5}, \frac{1}{5}, 0)$ .  $\square$

This note is organized as follows. In Section 2 we give a proof of our result by first showing a link between the reliability function and the tail signature through the so-called Bernstein polynomials. In Section 3 we apply our result to the computation of signatures for systems partitioned into disjoint modules with known signatures.

## 2. NOTATION AND MAIN RESULTS

Recall that the  $n+1$  Bernstein polynomials of degree  $n$  are defined on the real line by

$$b_{k,n}(x) = \binom{n}{k} x^k (1-x)^{n-k}, \quad k = 0, \dots, n.$$

These polynomials form a basis of the vector space  $P_n$  of polynomials of degree at most  $n$ .

**Proposition 4.** *We have*

$$(8) \quad h(x) = \sum_{k=0}^n \bar{S}_{n-k} b_{k,n}(x).$$

*Thus, the numbers  $\bar{S}_{n-k}$  ( $k = 0, \dots, n$ ) are precisely the components of the diagonal section of the reliability function  $h$  in the basis formed by the Bernstein polynomials of degree  $n$ .*

<sup>3</sup>Equivalently,  $\binom{n}{k} \bar{S}_k$  is the coefficient of  $x^k$  in  $p(x+1)$ .

*Proof.* The reliability function can be expressed as

$$h(\mathbf{x}) = \sum_{A \subseteq [n]} \phi(A) \prod_{i \in A} x_i \prod_{i \in [n] \setminus A} (1 - x_i).$$

Its diagonal section is then given by

$$h(x) = \sum_{A \subseteq [n]} \phi(A) x^{|A|} (1-x)^{n-|A|} = \sum_{k=0}^n \left( \sum_{|A|=k} \phi(A) \right) x^k (1-x)^{n-k}$$

and we immediately conclude by (5).  $\square$

By applying the classical transformations between power and Bernstein polynomial forms to Eq. (8), from the standard form of  $h(x)$ , namely  $h(x) = \sum_{k=0}^n a_k x^k$ , we immediately obtain

$$(9) \quad \bar{S}_k = \sum_{i=0}^{n-k} \frac{\binom{n-k}{i}}{\binom{n}{i}} a_i \quad \text{and} \quad a_k = \binom{n}{k} \sum_{i=0}^k (-1)^{k-i} \binom{k}{i} \bar{S}_{n-i}, \quad k = 0, \dots, n.$$

*Remark 2.* (a) Eqs. (8) and (9) explicitly show that  $h(x)$  encodes exactly the signature, no more, no less. This means that two  $n$ -component systems having the same  $h(x)$  also have the same signature and two  $n$ -component systems having the same signature also have the same  $h(x)$ .

It is also noteworthy that two distinct  $n$ -component systems may have the same  $h(x)$ , and hence the same signature. For instance, the 8-component system defined by the structure

$$\phi_1(\mathbf{x}) = x_1 x_2 \sqcup x_2 x_3 x_4 \sqcup x_5 x_6 x_7 x_8$$

has the same  $h(x)$  as the 8-component system defined by the structure

$$\phi_2(\mathbf{x}) = x_1 x_3 \sqcup x_2 x_4 x_5 \sqcup x_1 x_2 x_6 x_7 x_8,$$

namely  $h(x) = x^2 + x^3 - x^6 - x^7 + x^8$ .

(b) Eq. (8) also shows that  $\bar{S}_k$  is the component of  $h(x)$  along the basis polynomial  $b_{n-k,n}$ . Interestingly, by replacing  $x$  by  $1-x$  in (8), we obtain the following (dual) basis decomposition

$$h(1-x) = \sum_{k=0}^n \bar{S}_{n-k} b_{n-k,n}(x) = \sum_{k=0}^n \bar{S}_k b_{k,n}(x).$$

(c) Using summation by parts in Eq. (8), we derive the following identity

$$h(x) = \sum_{k=1}^n s_k h_{\text{os}_k}(x),$$

where  $h_{\text{os}_k}(x) = \sum_{i=n-k+1}^n b_{i,n}(x)$  is the diagonal section of the reliability function of the  $(n-k+1)$ -out-of- $n$  system (the structure  $\text{os}_k(\mathbf{x})$  being the  $k$ th smallest variable  $x_{k:n}$ ). By (3) we see that this identity is nothing other than the classical signature-based expression of the system reliability (see, e.g., [14]), that is,

$$\Pr(T_S > t) = \sum_{k=1}^n s_k \Pr(T_{k:n} > t).$$

We can now state and prove our main result. Let  $f$  be a univariate polynomial of degree  $m \leq n$ ,

$$f(x) = a_n x^n + \cdots + a_1 x + a_0.$$

The  $n$ -reflected polynomial of  $f$  is the polynomial  $f^R$  defined by

$$f^R(x) = a_0 x^n + a_1 x^{n-1} + \cdots + a_n,$$

or equivalently,  $f^R(x) = x^n f(1/x)$ .

**Theorem 5.** *We have*

$$h^R(x) = \sum_{k=0}^n \binom{n}{k} \bar{S}_k (x-1)^k.$$

Thus, for every  $k \in \{0, \dots, n\}$ , the number  $\binom{n}{k} \bar{S}_k$  is precisely the coefficient of  $(x-1)^k$  of the Taylor expansion about  $x=1$  of the  $n$ -reflected diagonal section of the reliability function  $h$ .

*Proof.* By Proposition 4, we have

$$h(x) = \sum_{k=0}^n \bar{S}_k b_{n-k,n}(x).$$

The result then follows by reflecting this polynomial.  $\square$

From Theorem 5 we immediately derive the following algorithm, which inputs both the number  $n$  of components and the reliability function  $h$  and outputs the signature  $\mathbf{s}$  of the system.

**Step 1.** Express the  $n$ -reflected polynomial  $h^R(x) = x^n h(1/x)$  in the basis  $\{(x-1)^k : k=0, \dots, n\}$  or, equivalently, the polynomial  $h^R(x+1)$  in the basis  $\{x^k : k=0, \dots, n\}$ . That is,

$$h^R(x) = \sum_{k=0}^n c_k (x-1)^k \quad \text{or} \quad h^R(x+1) = \sum_{k=0}^n c_k x^k.$$

**Step 2.** Compute the tail signature  $\bar{\mathbf{S}}$ :

$$\bar{S}_k = c_k / \binom{n}{k}, \quad k=0, \dots, n.$$

**Step 3.** Compute the signature  $\mathbf{s}$ :

$$s_k = \bar{S}_{k-1} - \bar{S}_k, \quad k=1, \dots, n.$$

*Remark 3.* The concept of signature was recently extended to the general non-i.i.d. case (see, e.g., [6]). In fact, assuming only that ties have null probability (i.e.,  $\Pr(T_i = T_j) = 0$  for  $i \neq j$ ), we can define the *probability signature* of the system as the  $n$ -tuple  $\mathbf{p} = (p_1, \dots, p_n)$ , where  $p_k = \Pr(T_S = T_{k:n})$ . This  $n$ -tuple may depend on both the structure and the distribution of lifetimes. It was proved [6] that in general we have

$$(10) \quad \sum_{i=k+1}^n \Pr(T_S = T_{i:n}) = \sum_{|A|=n-k} q(A) \phi(A),$$

where the function  $q: 2^{[n]} \rightarrow \mathbb{R}$ , called the relative quality function associated with the system, is defined by  $q(A) = \Pr(\max_{i \in [n] \setminus A} T_i < \min_{i \in A} T_i)$ .

Clearly, the right-hand side of (10) coincides with that of (5) for every semi-coherent system when  $q(A) = 1/\binom{n}{|A|}$  for every  $A \subseteq [n]$  (see [9] for more details).

Therefore the algorithm above can be applied to the non-i.i.d. case whenever this condition holds, for instance when the lifetimes are exchangeable.

An  $n$ -component semicoherent system is said to be *coherent* if it has only relevant components, i.e., for every  $k \in [n]$  there exists  $\mathbf{x} \in \{0,1\}^n$  such that  $\phi(0_k, \mathbf{x}) \neq \phi(1_k, \mathbf{x})$ , where  $\phi(z_k, \mathbf{x}) = \phi(\mathbf{x})|_{x_k=z}$ .

The following proposition gives sufficient conditions on the signature for a semicoherent system to be coherent.

**Proposition 6.** *Let  $([n], \phi)$  be an  $n$ -component semicoherent system with continuous i.i.d. component lifetimes. Then the following assertions are equivalent.*

- (i) *The reliability function  $h$  is a polynomial of degree  $n$  (equivalently,  $h(x)$  is a polynomial of degree  $n$ ).*
- (ii) *We have*

$$\sum_{k \text{ odd}} \binom{n}{k} \bar{s}_k \neq \sum_{k \text{ even}} \binom{n}{k} \bar{s}_k.$$

- (iii) *We have*

$$\sum_{k \text{ odd}} \binom{n-1}{k-1} s_k \neq \sum_{k \text{ even}} \binom{n-1}{k-1} s_k.$$

*If any of these conditions is satisfied, then the system is coherent.*

*Proof.* The equivalence (i)  $\Leftrightarrow$  (ii) immediately follows from Theorem 5 and the fact that  $h(x)$  is of degree  $n$  if and only if  $h^R(0) \neq 0$ .

The equivalence (ii)  $\Leftrightarrow$  (iii) follows from the straightforward identity

$$\sum_{k=0}^n \binom{n}{k} \bar{s}_k (-1)^k = \sum_{k=1}^n \binom{n-1}{k-1} s_k (-1)^{k-1}.$$

To see that the system is coherent when condition (i) is satisfied, suppose that component  $k$  is irrelevant. Then  $h(\mathbf{x}) = h(1_k, \mathbf{x})$  has less than  $n$  variables and therefore cannot be of degree  $n$ .  $\square$

*Remark 4.* (a) The equivalent conditions in Proposition 6 are not necessary for a semicoherent system to be coherent. For instance, the 4-component coherent system defined by the structure

$$\phi(\mathbf{x}) = x_1 x_2 \sqcup x_2 x_3 \sqcup x_3 x_4 = x_1 x_2 + x_2 x_3 + x_3 x_4 - x_1 x_2 x_3 - x_2 x_3 x_4$$

has a reliability function of degree 3.

- (b) The 6-component coherent system defined by the structure

$$\phi_1(\mathbf{x}) = x_1 x_2 \sqcup x_2 x_3 x_4 \sqcup x_3 x_4 x_5 x_6$$

has the same  $h(x)$  as the 5-component coherent system (or 6-component noncoherent system) defined by the structure

$$\phi_2(\mathbf{x}) = x_1 x_3 \sqcup x_2 x_4 x_5,$$

namely  $h(x) = x^2 + x^3 - x^5$ . We thus retrieve the fact that  $h(x)$  does not characterize the system (see Remark 2(a)) and cannot determine whether or not the system is coherent (see Remark 4(a)).

### 3. APPLICATION: MODULAR DECOMPOSITION OF SYSTEM SIGNATURES

We now apply our main result to show that (and how) the signature of a system partitioned into disjoint modules can be computed only from the partition structure and the module signatures.

Suppose that the system is partitioned into  $r$  disjoint semicoherent modules  $(A_j, \chi_j)$  ( $j = 1, \dots, r$ ), where  $A_j$  represents the set of the components in module  $j$  and  $\chi_j: \{0, 1\}^{A_j} \rightarrow \{0, 1\}$  is the corresponding structure function. Let  $n_j$  denote the number of components in  $A_j$  (hence  $\sum_{j=1}^r n_j = n$ ) and let  $\bar{\mathbf{S}}_j = (\bar{S}_{j,0}, \dots, \bar{S}_{j,n_j})$  denote the tail signature of module  $j$ .

If  $\psi: \{0, 1\}^r \rightarrow \{0, 1\}$  is the structure function of the partition of the system into modules, the modular decomposition of the structure  $\phi$  of the system expresses through the composition

$$\phi(\mathbf{x}) = \psi(\chi_1(\mathbf{x}^{A_1}), \dots, \chi_r(\mathbf{x}^{A_r})),$$

where  $\mathbf{x}^{A_j} = (x_i)_{i \in A_j}$  (see [2, Chap. 1]). Since the modules are disjoint, this composition extends to the reliability functions  $h_\phi$ ,  $h_\psi$ , and  $h_{\chi_j}$  of the structures  $\phi$ ,  $\psi$ , and  $\chi_j$ , respectively; that is,

$$(11) \quad h_\phi(\mathbf{x}) = h_\psi(h_{\chi_1}(\mathbf{x}^{A_1}), \dots, h_{\chi_r}(\mathbf{x}^{A_r})).$$

Indeed, the right-hand side of (11) contains no powers and hence is a multilinear polynomial.

According to Theorem 5, the tail signature of the system can be computed directly from the function

$$(12) \quad h_\phi^R(x) = x^n h_\psi(x^{-n_1} h_{\chi_1}^R(x), \dots, x^{-n_r} h_{\chi_r}^R(x)),$$

where  $h_{\chi_j}^R$  is the  $n_j$ -reflected of the diagonal section of  $h_{\chi_j}$ , that is,

$$(13) \quad h_{\chi_j}^R(x) = \sum_{k=0}^{n_j} \binom{n_j}{k} \bar{S}_{j,k} (x-1)^k.$$

Interestingly, Eqs. (12) and (13) show that (and how) the signature of the system can be computed only from the structure  $\psi$  and the signature of every module. Thus, the complete knowledge of the structures  $\chi_1, \dots, \chi_r$  is not needed in the computation of the signature of the whole system.

**Example 7.** Consider a 7-component system consisting of two serially connected modules (hence  $\psi(z_1, z_2) = z_1 z_2$ ) with signatures  $\mathbf{s}_1 = (\frac{1}{3}, \frac{2}{3}, 0)$  and  $\mathbf{s}_2 = (0, \frac{2}{3}, \frac{1}{3}, 0)$ , respectively. By (13) we have

$$h_{\chi_1}^R(x) = 2x - 1 \quad \text{and} \quad h_{\chi_2}^R(x) = 2x^2 - 1.$$

By (12) we then obtain

$$h_\phi^R(x) = x^7 (x^{-3} (2x - 1) x^{-4} (2x^2 - 1)) = 1 - 2x - 2x^2 + 4x^3,$$

from which we derive the system signature  $\mathbf{s} = (\frac{1}{7}, \frac{8}{21}, \frac{38}{105}, \frac{4}{35}, 0, 0, 0)$ .  $\square$

As an immediate consequence of our analysis we retrieve the fact (already observed in [8]; see [4, 5] for earlier references) that the signature always decomposes through modular partitions.<sup>4</sup> We state this property as follows.

<sup>4</sup>This feature reveals an analogy for instance with the barycentric property of mean values: The arithmetic (geometric, harmonic, etc.) mean of  $n$  real numbers does not change when one modifies some of the numbers without changing their arithmetic (geometric, harmonic, etc.) mean.



**Theorem 8.** *The signature of a system partitioned into disjoint modules does not change when one modifies the modules without changing their signatures.*

A *recurrent system* is a system partitioned into identical modules. Thus, for any recurrent system we have  $n_1 = \dots = n_r = n/r$  and  $\chi_1 = \dots = \chi_r = \chi$ . Eq. (12) then reduces to

$$(14) \quad h_{\phi}^R(x) = x^n h_{\psi}(x^{-n/r} h_{\chi}^R(x)) = h_{\chi}^R(x)^r h_{\psi}^R(x^{n/r} h_{\chi}^R(x)^{-1}).$$

Thus, to compute the tail signature  $\bar{\mathbf{S}}$  of the whole system the knowledge of the structures  $\psi$  and  $\chi$  can be simply replaced by the knowledge of their corresponding tail signatures  $\bar{\mathbf{S}}_{\psi}$  and  $\bar{\mathbf{S}}_{\chi}$ , respectively.

**Example 9.** Consider a system partitioned into  $r$  modules, each of whose consists of two components connected in parallel (system with componentwise redundancy). In this case we have  $h_{\chi}^R(x) = 2x - 1$  and

$$h_{\psi}^R(x) = \sum_{k=0}^r \binom{r}{k} \bar{S}_{\psi,k} (x-1)^k.$$

By (14) it follows that

$$h_{\phi}^R(x+1) = \sum_{k=0}^r \binom{r}{k} \bar{S}_{\psi,k} x^{2k} (2x+1)^{r-k},$$

from which we derive

$$\bar{S}_{\ell} = \sum_{k=\max(\ell-r,0)}^{\lfloor \ell/2 \rfloor} \frac{\binom{r}{k} \binom{r-k}{\ell-2k}}{\binom{2r}{\ell}} 2^{\ell-2k} \bar{S}_{\psi,k}, \quad 0 \leq \ell \leq 2r.$$

#### ACKNOWLEDGMENTS

The authors wish to thank Miguel Couceiro for fruitful discussions. This research is partly supported by the internal research project F1R-MTH-PUL-12RDO2 of the University of Luxembourg.

#### REFERENCES

- [1] R.E. Barlow and F. Proschan. Importance of system components and fault tree events. *Stochastic Processes and Their Applications*, 3:153–172, 1975.
- [2] R.E. Barlow and F. Proschan. *Statistical theory of reliability and life testing*. To Begin With, Silver Spring, MD, 1981.
- [3] P.J. Boland. Signatures of indirect majority systems. *J. Appl. Prob.*, 38:597–603, 2001.
- [4] G. Da, B. Zheng, and T. Hu. On computing signatures of coherent systems. *J. Multivariate Anal.*, 103(1):142–150, 2012.
- [5] I. Gertsbakh, Y. Shpungin, and F. Spizzichino. Signatures of coherent systems built with separate modules. *J. Appl. Probab.*, 48(3):843–855, 2011.
- [6] J.-L. Marichal and P. Mathonet. Extensions of system signatures to dependent lifetimes: explicit expressions and interpretations. *J. of Multivariate Analysis*, 102(5):931–936, 2011.
- [7] J.-L. Marichal and P. Mathonet. On the extensions of Barlow-Proschan importance index and system signature to dependent lifetimes. *J. of Multivariate Analysis*, 115:48–56, 2013.
- [8] J.-L. Marichal, P. Mathonet, and F. Spizzichino. On modular decompositions of system signatures. [arxiv.org/abs/1208.5658](https://arxiv.org/abs/1208.5658)
- [9] J.-L. Marichal, P. Mathonet, and T. Waldhauser. On signature-based expressions of system reliability. *J. of Multivariate Analysis*, 102(10):1410–1416, 2011.
- [10] G. Owen. Multilinear extensions of games. *Management Sci.*, 18:P64–P79, 1972.
- [11] G. Owen. Multilinear extensions of games. In: A.E. Roth, editor. *The Shapley Value. Essays in Honor of Lloyd S. Shapley*, pages 139–151. Cambridge University Press, 1988.

- [12] K. G. Ramamurthy. *Coherent structures and simple games*, volume 6 of *Theory and Decision Library. Series C: Game Theory, Mathematical Programming and Operations Research*. Kluwer Academic Publishers Group, Dordrecht, 1990.
- [13] F.J. Samaniego. On closure of the IFR class under formation of coherent systems. *IEEE Trans. Reliability*, 34:69–72, 1985.
- [14] F.J. Samaniego. *System signatures and their applications in engineering reliability*. Int. Series in Operations Research & Management Science, 110. New York: Springer, 2007.
- [15] L. Shapley. A value for  $n$ -person games. In *Contributions to the Theory of Games II (Annals of Mathematics Studies 28)*, pages 307–317. Princeton University Press, 1953.
- [16] L. Shapley and M. Shubik. A method for evaluating the distribution of power in a committee system. *American Political Science Review*, 48:787–792, 1954.

MATHEMATICS RESEARCH UNIT, FSTC, UNIVERSITY OF LUXEMBOURG, 6, RUE COUDENHOVE-KALERGI, L-1359 LUXEMBOURG, LUXEMBOURG

*E-mail address:* jean-luc.marichal[at]uni.lu

UNIVERSITY OF LIÈGE, DEPARTMENT OF MATHEMATICS, GRANDE TRAVERSE, 12 - B37, B-4000 LIÈGE, BELGIUM

*E-mail address:* p.mathonet[at]ulg.ac.be