1 This article is published as: Vanmaercke M, Poesen J, Radoane M, Govers G, Ocakoglu F, Arabkhedri M 2 (2012) How long should we measure? An exploration of factors controlling the inter-annual variation of 3 catchment sediment yield. Journal of Soils and Sediments: 12: 603-619. 4 5 How long should we measure? An exploration of factors controlling the inter-annual variation of 6 catchment sediment yield 7 8 Matthias Vanmaercke • Jean Poesen • Maria Radoane • Gerard Govers • Faruk Ocakoglu • Mahmood 9 Arabkhedri 10 11 M. Vanmaercke (⋈) • J. Poesen • G. Govers 12 K.U. Leuven, Department of Earth and Environmental Sciences, Celestijnenlaan 200 E, 3001 Heverlee, Belgium 13 e-mail: Matthias. Vanmaercke@ees.kuleuven.be 14 15 M. Vanmaercke 16 Fund for Scientific Research—Flanders, Belgium 17 18 M. Radoane 19 University of Suceava, Suceava, Romania 20 21 F. Ocakoglu 22 Eskisehir Osmangazi University, Department of Geological Engineering, Eskisehir, Turkey 23 24 M. Arabkhedri 25 Soil Conservation and Watershed Management Research Institute, Tehran, Iran 26 27 (⋈) Corresponding author: 28 Matthias Vanmaercke 29 Tel. +32 16 326420 30 Fax +32 16 322980 31 e-mail: Matthias.Vanmaercke@ees.kuleuven.be 32 33 34 **Abstract** 35 **Purpose:** Although it is well known that catchment suspended sediment yields (SY, [t km⁻² y⁻¹]) can vary 36 significantly from year to year, little information exists on the magnitude and factors controlling this variability. 37 This is crucial to assess the reliability of average SY-values for a given measuring period (MP) and is of great

38

geomorphic significance. This paper aims at bridging this gap.

Materials and methods: A world-wide database was compiled with time series of measured SY-values. Data from 726 rivers (mostly located in Europe, the Middle East and the USA) were collected, covering 15,025 annual SY-observations. The MPs ranged between 7 and 58 years, while catchment areas (A) ranged between 0.07 and 1.84 * 10⁶ km². For 558 catchments, also the annual runoff depths corresponding to the SY-observations were available. Based on this database, inter-annual variability was assessed for each catchment and relationships with factors potentially explaining this variability were explored.

Results and discussion: Coefficients of variation of SY varied between 6% and 313% (median: 75%). Annual SY-data are generally not normally distributed but positively skewed. Inter-annual variability generally increases with increasing average SY. No significant relationship was found between the inter-annual variability of SY and A, while weak but significant relationships were noted with the variability in annual runoff and rainfall depths. Detailed analyses of a sub-dataset corresponding to 63 catchments in Romania revealed no clear relationships between inter-annual variability of SY and land use or topographic characteristics. Nevertheless, indications were found that variability is larger for catchments with erosion-prone land use conditions.

Using a Monte Carlo simulation approach, the effect of inter-annual variability on the reliability of average SY-data was assessed. Results indicate that uncertainties are very large when the MP is short, with median relative errors ranging between -60 and 83% after five years of monitoring. Furthermore, average SY-values based on short MPs have a large probability to underestimate rather than to overestimate the long-term mean. For instance, the SY-value of a median catchment after a one year MP has a 50% probability to underestimate the long-term mean with about 22%. Uncertainties quickly decrease with the first years of measurement, but can remain considerable, even after 50 years of monitoring.

Conclusions: Uncertainties on average SY-values due to inter-annual variability are important to consider, e.g. when attempting to predict long-term average SY-values using a steady-state model, as they put fundamental limits to the predictive capabilities of such models.

Keywords Measuring period • Monte Carlo simulations • Runoff • Scale-dependency • Temporal variability • Uncertainty

1 Introduction

Reliable catchment sediment yield (SY, [t km⁻² y⁻¹]; i.e. the quantity of sediments transported through a river section per unit of upstream area and per unit of time) is crucial for various purposes, such as decision making in environmental management, hydraulic structures, the calibration and validation of models predicting SY and for a better understanding of the relationship between geomorphic activity and various biogeochemical cycles (e.g. Owens et al. 2005; Viers et al. 2009; Vanmaercke et al. 2011a). The reliability of SY estimates is known to depend the measuring method (e.g. Walling and Webb, 1981; Phillips et al. 1999; Verstraeten and Poesen, 2002; Moatar et al. 2006). However, SY is also known to vary significantly from year to year (e.g. Olive and Rieger 1992; Achite and Ouillon 2007; Morehead et al. 2003; Bogen 2004). As a result, the reliability of average SY-values also depends on the the length of the annual SY record, i.e. its measuring period (MP, [y]). Although the importance of inter-annual variability in SY is generally recognized, limited quantitative information is available on the magnitude of this inter-annual variability and the associated uncertainties on average SY values.

Various factors may be expected to influence the inter-annual variability of SY. Nordin and Meade (1981) suggest that variability decreases with increasing catchment area (A, [km²]). Such a decrease could be expected as the temporal variation of SY for sub-catchments is likely to average out at larger scales. Furthermore, larger catchments can be expected to have larger floodplains which may buffer SY changes at longer time scales (e.g. Phillips 2003). Also at intra-annual scale, A is known to strongly control the temporal variability of sediment fluxes (e.g. Morehead et al. 2003; Gonzales-Hidalgo et al. 2009). As a result, the required MP to determine SY with a given accuracy should decrease with increasing catchment area. However, not all studies confirm this trend: Olive and Rieger (1992) compiled long-term SY-data for several river systems in different environments and found no clear evidence of decreasing inter-annual variability with increasing A.

Climatic variation has been observed to have a dominant impact on the annual sediment load of various catchments (e.g. Restrepo and Kjerfve 2000; Ionita 2006; Achite and Ouillon 2007; Tote et al. 2011) but it is not clear how climatic variability and sediment yield variability are linked: Walling and Kleo (1979) found no clear relationship between the annual variability in SY and mean annual precipitation, for a dataset of 256 catchments with at least 7 years of SY-observations.

Also land use may affect the inter-annual variability of SY. It is well known that catchments under arable land are generally more sensitive to erosive rainfall events (e.g. Ward et al. 2009; Notebaert et al. 2011). This may not only result in larger average SY values, but also in a larger temporal variability of SY for the same rainfall conditions. Johnson (1994) observed an increase in the variability of suspended sediment concentrations (SSC) after forestry works in two Scottish catchments, indicating a greater sensitivity of the SY for these catchments to climatic variability. Nevertheless, no study exists that quantifies the relative importance of land use in explaining the variability of annual SY compared to other factors.

Apart from our limited understanding about the magnitude and factors controlling inter-annual SY variability, also the effect of this variability on the reliability of average SY-values remains difficult to assess. Based on the central limit theorem, previous studies (e.g. Walling 1984; Olive and Rieger 1992) have proposed to assess the uncertainty of average SY-values due to inter-annual variability as:

where SE_{SY} is the standard error of the mean SY and CV_{SY} its coefficient of variation. Although Eq. 1 suggests

$$SE_{SY} = \frac{CV_{SY}}{\sqrt{MP}}$$
 (Eq.1)

an easy method to assess the reliability of average SY-data, the resulting standard errors and confidence intervals may be subject to large errors. Annual SY-values for a given catchment are not necessarily normally distributed. Several studies show that average SY-values can be strongly influenced by one or more extreme events (e.g. Bogen 2004; Achite and Ouillon 2007; Tomkins et al. 2007). This skewed nature of SY-data limits the calculation of reliable SY_{mean} confidence intervals, based on the central limit theorem (e.g. Hastings 1965; Bonett and Seier 2006).

As a result, very few guidelines exist on how long SY should be measured to obtain a representative average value under various conditions. Based on the analyses of long-term measuring campaigns at six gauging stations in Canada and using the approach of Eq. 1, Day (1988) suggests that a MP of one decade suffices to obtain sediment loads, as estimated standard errors ceased to decrease after ten years. However, a closer inspection of the results of Day (1988) shows that although uncertainties did not further decrease, they were still considerably

high. After ten years of monitoring, the estimated SE_{SY} was still approximately 40%. Summer et al. (1992)

arrived at a similar conclusion, based on data from six gauging stations in Austria. Feyznia et al. (2002) suggest optimal measuring periods between 9 and 25 years after statistical analyses of SY-data for 13 catchments in Iran.

However, given the limited sample size used in these studies and the limitations of the standard error approach, it

121 is clear that the conclusions drawn from these studies may not be generally valid.

A major reason explaining this limited understanding of the factors controlling inter-annual variability and its effect on the reliability of average SY-values is the lack of studies that quantify the inter-annual variability of SY for a sufficiently large number of catchments representing a wide range of environmental and catchment characteristics. With the exception of the earlier mentioned study by Walling and Kleo (1979), most studies on the inter-annual variability of SY focus on a limited number of catchments, often located in a specific geographic region. As indicated by Olive and Rieger (1992), these studies were often restricted by the relatively limited number of long-term SY-observations. However, over the last decades more and longer time series of annual

SY-data have become available, making a more general analysis possible.

Therefore, the objectives of this study are: i) to better explore the magnitude and factors controlling inter-annual variability of SY, based on a large dataset of measured SY that represents a wide range of environmental characteristics; ii) to provide and apply a method that allows assessing the reliability of average SY based on its MP and its inter-annual variability; and iii) to discuss the implication of our findings for the reliability of average sediment yields.

134 135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

118

119

120

122

123

124

125

126

127

128

129

130

131

132

133

2 Materials and Methods

2.1 The sediment yield dataset

A database of catchments with individual annual suspended SY observations was compiled based on data to which the authors had access. A catchment was included in the analyses if: i) the catchment area (A) was known; ii) the latitude and longitude of the catchment outlet (i.e. the gauging station) was known with a precision of at least 5'; and iii) annual suspended SY data were available for at least seven individual years. The last selection criterion agrees with that proposed by Walling and Kleo (1979) and was considered as a reasonable trade-off allowing to retain a sufficiently large number of catchments (representing a wide range of environmental characteristics) while having a sufficiently long MP to reflect the inter-annual variations. If reported, the annual runoff depths, corresponding to the annual SY observations were also included in the dataset.

In total, 15,025 individual annual SY observations from 726 catchments were retained. For 558 catchments (representing 11,173 catchment-years of observations) the runoff depths corresponding to the annual SY observations were also known. Fig. 1 displays the location of all outlets of the catchments considered in this study. The large majority of the catchments are clustered in the Middle East, Europe and the USA, while many regions are covered by few or no data. Nonetheless, the available data represent a wide range of physical and climatic conditions including the Artic and Boreal regions, temperate lowlands, various mountain ranges and (semi-) arid regions. Table 1 shows an overview of the collected data and their original source per country.

Although the details of the measuring procedure are not known for all catchments, the large majority of the annual SY-data were obtained by applying runoff discharge - suspended sediment concentration (SSC) rating curves to series of continuously measured runoff discharges (with at least a daily temporal resolution) and integrating the resulting continous sediment export values over a year (e.g. Palsson et al. 2000; Arabkhedri et al. 2004; EIE, 2005). For some catchments SSC-values were only measured for a relatively short period, while the 158 resulting Q-SSC rating curve was applied to a longer time series of runoff discharges (e.g. Close-Lecocq et al. 159 1982; Pont et al. 2002). However, for > 95% of the catchments SSC was sampled regularly throughout the MP. 160 It is well known that deriving total SY from rating curves is not without problems and may lead to an 161 underestimation of true sediment loads if the appropriate corrections are not applied (e.g. Asselman 2000). 162 However, it was not possible to assess to what extent such errors may have affected the SY-values in our 163 database and we did not attempt to make any further correction to the considered data. 164 Fig. 2 displays the frequency distribution of catchments according to their A and MP. Catchment areas range 165 from 0.07 to 1.84 * 10⁶ km², with most catchments having an A between 100 and 10,000 km². Measuring periods 166 range between 7 and 58 years (average: 20.7 years; median: 17 years). The majority of catchments considered 167 have a MP of 7 to 15 years. However, also a significant fraction of catchments has a MP of 30 years. Most of 168 these catchments are located in Iran (see Table 1). Regression analyses indicated no relationship between the A 169 and MP of the considered catchments. For most considered catchments, the MP consisted of a series of 170 consecutive years. For 146 catchments the sediment record showed a hiatus of one or more years. Evidently,

171172173

174

175

176

177

178

179

180

185

186

187

188

189

2.2 Characterization of the inter-annual variability

years for which no SY-value was available were not considered for the MP.

A common measure to express the variability of a data series is the coefficient of variation (CV, %; i.e. the standard deviation divided by the mean). However, analysis of the considered 726 time series of annual SY-values indicated that more than half of the time series are not normally distributed (according to Lilliefors tests at a significance level of 5%; Lilliefors 1967). Most time series are positively skewed. Furthermore it was observed that the fraction of normally distributed time series decreases as MP increases (Fig. 3). We therefore calculated also several other non-parametric measures to evaluate the inter-annual variability in SY, such as the ratio between the maximum and minimum observed value and the coefficient of dispersion (Bonett and Seier 2006).

- However, none of these measures yielded significantly different results or trends and were generally less reliable.
- The maximum/minimum ratio was significantly correlated with MP and only considers two observations of the
- distribution, while the very low median SY of some catchments resulted in disproportionally large coefficients of
- dispersion. It was therefore decided to only show and discuss the results based on the CV.

The non-normal nature of the considered time-series does not allow us to interpret CVs in the context of Gaussian statistics. For example, they can not be used to estimate standard errors as discussed in the introduction or to calculate confidence intervals (e.g. Bonett and Seier 2006). Nonetheless, also for non-normally distributed data the CV is a meaningful measure to describe the variability (Hasting 1965). Furthermore, the CV was commonly used in other studies discussing the inter-annual variability of SY (e.g. Walling and Kleo 1979; Olive and Rieger 1992).

190191192

193

194

195

196

197

2.3 Potential controlling factors of inter-annual variability

Several factors were considered that potentially explain observed differences in inter-annual variation in SY between catchments. For each catchment, the catchment area was derived from its original source. Furthermore, an estimation of the average annual rainfall depth (P_{mean} , [mm y^{-1}]) and its variability was made, based on the CRU TS 2.0 dataset (Mitchell et al. 2004). This global dataset contains estimates of monthly rainfall on a 0.5° resolution for the period 1901-2000, based on measured records. The rainfall data of the grid cell in which the

catchment outlet was located was considered to be representative for that catchment. This assumption was made because: i) for about half of the number of catchments in the database, A is smaller than one grid cell; ii) P_{mean} values of neighbouring gridcells are generally strongly correlated with each other; and iii) for a large number of catchments, the location of the gauging station was not sufficiently accurate to determine the upstream area from a digital terrain model. Furthermore, rainfall characteristics for each catchment were based on the entire period covered by the CRU TS 2.0 dataset and not for the MP of the annual SY observations. This was done because for about 207 catchments, no matching P_{mean} data were available as the MP of the SY-data included years after 2000. Moreover, for 304 catchments, annual SY observations were reported for hydrological years. The exact start and end dates of these hydrological years were often unknown or could not be matched with the reported rainfall data since only monthly values were available (i.e. when a hydrological year started in the middle of a month). Furthermore, P_{mean}-values and the coefficients of variation in annual rainfall (CV_P) were found to generally differ little when they were calculated for the period 1901-2000 or for the MP of the SY-data. Since the calculated P_{mean}- and CV_p-values are based on very coarse resolution datasets and do not correspond with the actual rainfall conditions that occurred during the MP of each SY time series, they are subjected to important uncertainties. Nonetheless, it is expected that they provide reasonable indication of the rainfall characteristics in the considered catchments.

For the catchments with measured annual runoff depths available (n = 558, see section 2.1), also the mean annual runoff depths (Runoff_{mean}, [mm]) and the coefficients of variation of the annual runoff depth (CV_{Runoff}) were considered as a potential controlling factor.

The evaluation of land use and topography effects on SY variability can be expected to be difficult if a global dataset is used, as many other controls will vary strongly between different catchments. Therefore, a subset of catchments within a relatively small geographical region was selected. This subset consisted of 65 catchments in the Siret basin, Romania (INHGA 2010, see Fig. 1). Measuring periods for these catchments ranged between 13 and 58 years (median: 51 years). Although SY-data from 67 catchments in the Siret basin were available, 2 subcatchments are mainly located in Ukraine. These catchments were excluded from the subset, as their drainage area was not covered by the data layers used (see Fig. 1). For each catchment in this subset, the average catchment slope (%) was calculated, based on SRTM data with a 90 m resolution (CGIAR 2008) and the fraction of arable land in each catchment was determined, based on the CORINE land cover map of 1990 (EEA 2010). Furthermore, an averagely estimated of sheet and rill erosion rate (SEM, [t km⁻² y⁻¹]) was calculated based on a recently published map of sheet and rill erosion rates in Europe (Cerdan et al. 2010). This map is based on empirical relationships between sheet and rill erosion rates and land use, topography and soil characteristics and is expected to give an unbiased estimate of sheet and rill erosion rates.

2.4 Assessing the reliability of average sediment yields in terms of their inter-annual variability

As explained in the introduction, the generally non-normal distribution of SY time series (Fig. 3) impedes us from using the central limit theorem to assess the uncertainty on average SY-values with a known MP in terms of its inter-annual variability (Eq. 1). Therefore, a different strategy was developed to assess the reliability of average SY-values as a function of their MP.

As a first exploration of the effects of inter-annual variability on the uncertainty, the relative error of the average SY for a given MP ($SY_{mean,i}$) was compared to the average SY after the first 30 years of monitoring ($SY_{mean,30}$)

for all time series with at least 30 years of SY-observations (n = 226). The relative error was calculated as:

$$(SY_{mean,i} - SY_{mean,30})/SY_{mean,30}$$
 (Eq. 2)

with i = MP, and $SY_{mean,30}$ the mean SY after 30 years of measurement. For catchments with more than 30 years of SY observations, only the first 30 years were considered for the calculation of $SY_{mean,30}$.

Clearly, the relative errors resulting from this approach cannot be used to assess the uncertainty on SY_{mean} -values for other catchments, as they are strongly controlled by the moment in the MP during which exceptional high SY-values occur. Furthermore, the relative errors evidently converge to zero as the MP approaches 30 years, but even after thirty years of monitoring, uncertainty on SY_{mean} -values may still be considerable due to inter-annual variability. Therefore, a Monte Carlo simulation procedure was used to assess the uncertainty ranges on average SY-values with a known MP due to inter-annual variability. The procedure of this simulations is explained below.

As a first step, cumulative distribution functions (cdf) were fitted through each time series with at least 30 years of observations (n = 226). Contrarily to Eq. 2, the full MP was considered for time series with more than 30 years of observations. While several potential distribution functions were tested, it was found that most annual SY records were best described with a Weibull distribution (Weibull, 1951). Weibull distributions are commonly used in various fields, including hydrology (e.g. for flood frequency analyses,e.g. Heo et al. 2001). The cdf of a Weibull distribution is defined as:

255
$$F(x) = 1 - e^{-(x/\lambda)^k}$$
 (Eq. 3)

With F(x) the probability on a value $\le x$, $\lambda > 0$ a scaling parameter and k > 0 a shape parameter. Using a maximum likelihood estimate procedure, the λ and k parameters of Eq. 3 were fitted for each time series. For a large majority of the catchments the cumulative distribution of the individual annual SY observations could be well described with Eq. 3. with a median r^2 of 0.91 between observed and fitted annual SY valies. However, for some time-series, Eq. 3 yielded a much lower r^2 (minimum: 0.40), which could be attributed to a poor correspondence between observed and fitted values for the largest observed SY. Therefore, all distribution fits with an $r^2 < 0.70$ were excluded for the Monte Carlo simulations (n = 24). The r^2 values for the 202 remaining catchments ranged between 0.70 and 0.99 (median $r^2 = 0.92$, average $r^2 = 0.90$). A very strong negative correlation between the k parameter of Eq. 3 and the CV_{SY} of the considered time series was observed ($k=1.06*CV_{SY}^{-94}$; $r^2 = 0.95$; n = 202).

In a next step, the fitted k and λ parameters were used to randomly generate a generic series of 10,000 annual SY observations for each of the 202 considered catchments. This was done by inverting Eq. 3 to:

$$SY_{p} = \lambda (-\ln(p))^{1/k}$$
 (Eq. 4)

Where SY_p is the simulated annual SY corresponding with a randomly picked number p between zero and one. Note that this approach assumes that all annual SY-value are independent of each other, which is in reality not always the case. However, this simplification is justified since we mainly aim to assess the variability of actual SY-values, regardless of the trends or mechanisms behind this variability.

273 Based on this generated SY_p -series, potential relative errors on the SY_{mean} were simulated by randomly picking 274 50 observations out of the simulated series and (similarly to Eq. 2) calculating the relative error as a function of 275 the simulated measuring period:

276 Relative error $SY_{mean,i} = (SY_{mean,i} - SY_{mean,LT})/SY_{mean,LT}$ (Eq. 5)

Where $SY_{mean,i}$ is the average of the i first values of the 50 randomly picked SY_p -values $(1 \le i \le 50)$ and SY_{mean,LT} is the average of all 10,000 SY_p-values. For each catchment, this procedure was repeated 1,000 times, which resulted in thousand simulated relative errors for each MP. The median of these 1,000 simulated relative errors corresponds with the median relative error that can be expected for a given MP, while the highest and lowest 2.5% of the simulated relative errors indicate the boundaries of the 95% confidence interval of the actual relative error.

282 283 284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

277

278

279

280

281

3 Results

3.1 Magnitude and controlling factors of the inter-annual variability of sediment yield

Fig. 4 depicts the observed inter-annual variability of SY, annual runoff discharge and their corresponding exceedance probabilities, based on all available SY and runoff data. Coefficients of varation for SY (CV_{SY}) range between 6% and 313% (median: 75%), while 95% of the catchments have a CV_{SY} between 29% and 230%. Cvs of annual runoff depth (CV_{Runoff}) are generally lower, with values ranging between 4 and 278% (median: 37%).

Fig. 5 plots the observed CV_{SY} against the average SY-value for the entire MP (SY_{mean}) for each catchment. Weak but significant positive relationships ($r^2 = 0.13$, $p < 10^{-4}$) were found, indicating that catchments with a large SY_{mean} tend to have a larger inter-annual variability of SY compared to catchments with a small SY_{mean} . No significant relationships were found between CV_{SY} and catchment area ($r^2 = 0.01$, p=0.35; Fig. 6). Boxplots of the CV_{SY} for different A-ranges also indicate only small differences. Although a slight decrease in the median and mean CV_{SY} can be noted with increasing A for catchments larger than 10 km², two-sided Wilcoxon rank sum tests between neighbouring boxplots (at a significance level of 5%) only indicated significant differences between catchments with $A < 10 \text{ km}^2$ and catchments with $10 < A < 100 \text{ km}^2$ and between catchments with $10^3 < 100 \text{ km}^2$

 $A < 10^4$ and $10^4 < A < 10^5$ km².

No meaningful relationship was observed between SY_{mean} and the corresponding average annual runoff depth (r^2 = 0.02, p = 0.0002). Nonetheless, a significant relationship was found between CV_{SY} and the coefficients of variation of the corresponding annual runoff depths ($r^2 = 0.35$, p < 10^{-4} ; Fig. 7). P_{mean} showed only very weak negative correlation with CV_{SY} ($r^2 = 0.05$, p < 10^{-4}). However, a much stronger relationship was noted between the coefficient of variation of the annual rainfall depths (CV_P) and CV_{SY} ($r^2 = 0.21$, $p < 10^{-4}$; Fig. 8). Note that for one catchment, the estimated CV_P was exceptionally low, compared to the CV_P of other catchments (Fig. 8). As this catchment is located on Svalbard (Norway), a relatively data-poor region regarding climatic records, this CV_p-value was considered to be unreliable and the catchment was excluded from the regression analysis.

The relationships between the CV_{SY} and various catchment characteristics for the 65 selected subcatchments of the Siret basin (see Fig. 1) are shown in Fig. 9. Two of the catchments were known to be affected by reservoirs in their upstream area and were therefore not included in the regression analyses. The results indicate no clear trend between CV_{SY} and catchment area, the average catchment slope, or the fraction of arable land. A strong negative correlation was found between the average slope and the fraction of arable land in each catchment (r^2 =

0.81, p < 10^{-4}). Furthermore, no significant relationship was found between SEM and SY_{mean}, while a weak but significant positive correlation was observed between CV_{SY} and SEM ($r^2 = 0.10$, p = 0.01).

314315316

317

318

319

320

321

322

323

324

325

326

313

3.2 Relative errors on average sediment yields due to inter-annual variability

Fig. 10 displays the relative error of the average SY for a given MP ($SY_{mean,i}$) as calculated by Eq. 2 for all catchments with at least 30 years of SY-observations (n = 226). As this figure shows, relative errors on SY_{mean} -values based on short MPs can be very large. The negative median error further indicates that SY_{mean} -values based on a short MP underestimate the long-term average value. However, many of the considered time series show a very similar evolution of the relative errors as a function of the MP. This can be explained by the fact that many of the considered catchment are spatially clustered (Fig. 1) and were monitored during the same period. The results of the Monte Carlo simulations are displayed in Fig. 11. Each boxplot in the top figure displays the distribution of the simulated median error for a given MP for all considered catchments (see section 2.4), while the boxplots in the lower figure display the corresponding lowest and highest 2.5% of the simulated errors and indicate a 95% probability interval of the relative errors. Similar to Fig. 10, median relative errors are generally

327328329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

4 Discussion

4.1 Reliability of the obtained results and trends behind the observed variability

negative, while the 95% probability intervals of the errors are generally asymmetrical.

Some sources of uncertainty should be considered before discussing the observed results. First, the data of this study were collected by a range of measuring methods, which induce different degrees of uncertainty. For example, the timing and frequency of suspended sediment sampling and the extrapolation procedure used may have a large impact on the obtained yearly SY values. Annual SY values based on low-frequency sampling strategies often risk to underestimate the actual sediment export because important events may be missed. On the other hand, if one of the few sampling moments coincides with a large event the importance given to this event may be too high. In some occasions, this can lead to an overestimation of the annual SY value. Uncertainties due to low sampling frequencies can be high for SY data that were calculated with discharge-weighted average concentration methods (e.g. Moatar et al. 2006). However, also SY-data derived from Q-SSC relationships may be subjected to similar errors (e.g. Walling and Webb 1981; Phillips et al. 1999). Furthermore Q-SSC relationships are not unique but may show important variations within and between events, seasons and years. SY estimations based on this procedure therefore strongly depend on the representativeness of the rating curves used (e.g. Walling and Webb 1981; Phillips et al. 1999; Asselman 2000; Morehead et al. 2003). Since these uncertainties affect the annual SY values, they also affect the inter-annual variations considered in this study. Unfortunately, insufficient data were available to assess the importance of these uncertainties for our results. Another important source of uncertainty on the obtained results is the potential presence of dams and reservoirs in some catchments. As indicated by various studies, the numerous dams and reservoirs constructed over the last decades have a large impact on the sediment flux of many drainage basins, especially in Europe and the United States (e.g. Vörösmarty et al. 2003; Walling 2006). Although at least 187 of the 726 catchments considered in this study are known to be unaffected by dams or reservoirs, this information is not available for the other catchments. Most likely, a considerable fraction of the other 539 catchments may have reservoirs in their upstream area.

The presence of reservoirs is generally expected to decrease the SY, as part of the sediments are trapped (e.g. Vörösmarty et al. 2003; Walling and Fang 2003). However, examples have also been reported of reservoirs having no clear effect on monitored SY (e.g. Phillips 2003). Bogen and Bønsnes (2005) even noted an increase in sediment loads after hydropower works in the Beiarelva catchment (Norway). Reservoirs may not only influence the SY, but also the variability in SY. However, the impact of reservoirs on the temporal variability of sediment loads is difficult to assess as this depends on the catchment characteristics, the location of the reservoir in the catchment, their operating characteristics and the moment in the MP of the SY-record at which the reservoir starts functioning. For example, the construction of a reservoir may result in a significant decrease in both the SY and the CVSY of a catchment. However, if the catchment was already monitored before the construction of the reservoir, the sudden decrease in SY may lead to an increase of the CV_{SY} for the complete MP of the SY-record.

363

353

354

355

356

357

358

359

360

361

362

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

Although the results of this study are mainly expressed in terms of coefficients of variation, the inter-annual variability of SY behind these coefficients are not always merely a result of random variations. Fluctuations in sediment loads can be the result of specific trends or cycles related to land use changes, tectonic events, climatic changes, temporal storage of sediments in channels or floodplains, or the occurrence of extreme events (e.g. leading to significant changes in channel morphology) during the MP (e.g. Morehead et al. 2003; Walling et al. 1998; Walling 2006; Ouimet et al. 2007; Tote et al. 2011).

Despite these uncertainties, the large number of catchments included in the database and the wide range of their environmental characteristics can be expected to provide a representative sample of the measured variability in sediment fluxes under the current conditions in the USA and significant parts of Europe and the Middle East (Fig. 1). Whereas the aim of this study is mainly to quantify the magnitude of inter-annual variability of measured SY-values and to explore the importance of potentially controlling factors, comprehension of the mechanisms and processes behind this variability requires a more in-depth and catchment-specific approach. A significant part of this variability may be driven by anthropogenic impacts. However, as humans are currently one of the most important geomorphic agents (e.g. Hooke 2000; Vörösmarty et al. 2003; Cendrero et al. 2006, Kareiva et al. 2007), their impact on the inter-annual variability of SY should also be considered.

Finally, it should be noted that the results of this study only consider the inter-annual variability in suspended sediment loads. A review by Turrowski et al. (2010) indicates that also the temporal variability of bedload and its contribution to the total sediment load may be considerable and driven by other processes than those affecting the variability in suspended sediment load.

382 383 384

388

389

390

391

392

4.2 Magnitude and controlling factors of inter-annual variability of sediment yield

385 The results of this study show that inter-annual variability in SY varies significantly between catchments (Fig. 386 4). As discussed in the introduction catchment area, climatic variability and land use may be expected to control 387 this variability. However, our results show very little evidence of this.

No meaningful decrease in CV_{SY} with increasing catchment area could be detected (Fig. 6). The variability of SY for catchments < 10 km² appears even to be smaller than that for larger catchments. This may be attributable to the fact that 14 out of the 27 catchments in this group are located in the Boreal region of Sweden and Finland, where the inter-annual variability was noted to be low compared to other regions. However, even for catchments within the same river basin, no clear trend between A and CV_{SY} was found (Fig 9a). Our results therefore concur with the findings of Olive and Rieger (1992) and indicate that catchment area has no strong control on the interannual variability of SY.

Likewise, no significant relationship was found between the fraction of arable land and the CV_{SY} for the considered subcatchments in the Siret Basin (see Fig. 9c). This is may be explained by the very strong negative correlation between the average catchment slope and the areal fraction of arable land of the catchments (Fig. 9e). Catchments with a high proportion of arable land are therefore not necessarily more sensitive to erosion. The estimated sheet and rill erosion rates (SEM) consider the combined effect of land use, topography and soil characteristics (Cerdan et al. 2010). Hence, they provide a more integrated measure of this erosion sensitivity. Indeed, a weak (but significant) positive relationship was found between the average SEM and CV_{SY} of the selected catchments (see Fig. 9d). This suggests that the presence of erosion-prone land use conditions may indeed contribute to the inter-annual variability of SY. However, the relationship is too weak to draw any hard conclusions.

Although our results confirm the result of previous studies indicating no clear relationship between P_{mean} and CV_{SY} (Walling and Kleo 1979), a clearly significant positive correlation between CV_P and CV_{SY} was found (Fig. 8). This shows that inter-annual variability in SY is indeed to some extent controlled by climatic variability. Nonetheless, the observed relationship is weak. More detailed rainfall data corresponding to the actual period of SY-measurements may further improve this relationship. However, also the relationship between CV_{SY} and CV_{Runoff} (Fig. 7) is relatively weak. As these CV_{Runoff} -values are based on measured data corresponding to the SY measuring period, this indicates that also climatic variability at an annual time scale has only a limited influence on the inter-annual variability of SY.

The generally poor correlations between CV_{SY} and various catchment characteristics mainly illustrate that a large part of the observed variation cannot be accounted for with the considered indicators. An important part of the observed scatter may be attributed to the unknown trends and uncertainties discussed in section 4.1. Furthermore, other factors that were not considered in this study due to a lack of data (e.g. catchment geology, distance to potential sediment sources) may also explain some of the observed variance. Furthermore, it is well known that in many cases the largest fraction of the annual SY is transported during one or a few large flood events (e.g. Markus and Demissie 2006; Vanmaercke et al. 2010), while several case studies illustrate the impact of an exceptional climatic or tectonic event on average SY for longer time periods (e.g. Beylich and Gintz 2004; Bogen 2004; Hovius et al. 2011; Tote et al. 2011). As a result, also inter-annual variability in SY is probably largely controlled by the occurrence of high-magnitude events with a long recurrence interval. This would also concur with the observation that SY-time series are generally positively skewed (Fig. 3).

Apart from the fact that predicting the occurrence of such events is generally very difficult, assessing the effects of these events on SY requires a detailed and spatially explicit understanding about the potential sediment sources and sinks in the catchment. Such knowledge is generally not available for most catchments. As a result, the inter-annual variability in catchment SY remains very difficult to predict.

4.3 Uncertainties on average sediment yields due to inter-annual variability

As discussed in the previous section, inter-annual variability on SY varies greatly between catchments, and correlates only poorly with the considered catchments characteristics. As a result, also relative errors on average SY-values vary greatly between the catchments and are difficult to predict. Nevertheless, important conclusions

433 can be drawn from the simulated relative errors per MP, based on all catchment with a sufficiently long time 434 record. Both Fig. 10 and 11 clearly illustrate that relative errors on average SY-values can be very large for short 435 MPs and are generally asymmetrical. Due to their strong auto-correlation and time-specific nature, the calculated 436 errors of Fig. 10 cannot be used to assess the uncertainty on SY_{mean} -values for other catchments. However, the 437 Monte Carlo simulation approach discussed in section 2.4 avoids these problems and allows to assess the order 438 of magnitude of these uncertainties. 439 The generally negative median relative errors (Fig. 11 top) imply that average SY-values based on short 440 measuring periods are generally more likely to underestimate the actual long-term mean. This underestimation of 441 SY can be considerable, especially for short measuring periods (< 5 yr). E.g. for the median catchment of our 442 Monte Carlo simulations, a SY-value obtained after one year of monitoring has a 50% probability to 443 underestimate the long-term mean by about 22%. However, these underestimations quickly decrease with 444 increasing MP and after 5 years of monitoring, median underestimations can be expected to be less than -5%. 445 Also the 95% error ranges on average SY-values are generally not symmetrical (Fig. 11 bottom). For a median 446 catchment where SY was monitored for only one year, the relative error on the long-term mean has a 95% 447 probability to vary between about -95% and +209%. When we solve Eq. 5 to $SY_{mean,LT}$, this means that when a 448 SY of 100 t km⁻²y⁻¹ is measured during one year, the 95% confidence interval on the actual long-term SY_{mean} 449 ranges between 32.4 and 2000 t km⁻²y⁻¹. These numbers not only illustrate the large uncertainties on average SY-450 values derived from short measuring periods. They also show the importance of considering the generally 451 skewed nature of SY time series when assessing these uncertainties. The median catchment in our database has a 452 CV_{SY} of 75%. Calculating the corresponding uncertainties for the same SY-value and MP using Gaussian 453 statistics yields a clearly different 95% confidence interval of -50 (hence zero) to 350 t km⁻²y⁻¹ and fails to 454 identify the generally larger probability of underestimating the long term mean SY. 455 Similarly to the median errors, the 95% probability range of relative errors quickly decreases as the MP increases 456 (Fig. 11). For the same median catchment, the relative error has a 95% probability of ranging between -45% and 457 +57% after ten years of monitoring. This implies that if ten years of monitoring results in an average SY of 100 t 458 km⁻²y⁻¹, the 95% confidence interval on the actual long-term SY_{mean} would range between 64 and 182 t km⁻²y⁻¹. 459 As can be seen on Fig. 11, errors decrease relatively little when measuring periods further increase. For example, 460 the relative error on the mean SY after 50 years of monitoring for the same median catchment may still be 461 expected to range between -22% and +24%, corresponding to a 95% confidence interval of 81 to 128 t km⁻²y⁻¹ 462 for a mean value of 100 t km⁻²y⁻¹. This finding agrees relatively well with the studies of Day (1988) and Summer 463 et al. (1992), who suggested that continuing measurements after ten years contributes only little to the reliability

467 468 years.

464

465

466

469

470

471

472

4.4 Comparison with other sources of error and implications

The uncertainties on SY_{mean} -values discussed in the previous section are large. Especially for shorter measuring periods, the potential error due to inter-annual variability may be at least as important as other sources of errors on measured SY-data. Based on a detailed dataset of 21 small flood-retention ponds in Belgium, Verstraeten and Poesen (2002) estimated that measuring errors on SY-values derived from pond siltation rates range between 40

of the measured average SY. Nevertheless, the error ranges indicated in Fig. 11 clearly illustrates that the

uncertainties on SY_{mean}-values due to inter-annual variability may still be considerable, even after a MP of 50

and 50%. For SY-values derived from measurements at gauging stations, the total measuring error is often difficult to assess, as this depend on various factors such as the sampling frequency (e.g. Walling and Webb 1981; Phillips et al. 1999; Moatar et al. 2006), the sampling regime (e.g. at regular time intervals or on a flowproportional basis; Steegen et al. 2000), the sampling location in the river cross-section (e.g. Steegen and Govers 2001), and errors on the runoff discharges (e.g. Lohani et al. 2006). However, uncertainties on SY_{mean}-values due to inter-annual variability for short measuring periods (< 5 yr) may at least be as important as these other individual sources of error. For example, Moatar et al. (2006) estimated for 36 rivers in Europe and the USA the effect of infrequent sampling on the reliability of SY-values calculated with the discharge-weighted sediment concentration method. They found median relative errors ranging between 0 and -55%, depending on the considered catchment. This range of error compares relatively well with our median relative errors when SY is monitored for only one year (see Fig. 11). At an intra-annual scale, infrequent but large events are known to strongly control annual SY-values (e.g. Markus and Demissie 2006; Gonzales-Hidalgo et al. 2009; Vanmaercke et al. 2010). SY-measurements which are based on relatively low sampling frequencies therefore have a larger probability of underestimating the actual sediment load, as they are more likely to not include the largest events (e.g. Webb et al. 1997; Moatar et al. 2006). Similarly, SY_{mean}-values based on a short MP have a relatively larger probability of underestimating the long-term SY_{mean} . However whereas underestimations due to low sampling infrequencies generally decrease with increasing A (Webb et al. 1997; Moatar et al. 2006), no indications were found that also inter-annual variability is controlled by catchment scale (see Fig. 6). The results of this study show that average SY-values based on short measuring periods should be interpreted with great caution. Not only are they subjected to very large ranges of uncertainty, they may also expected to be biased and underestimate the long-term average SY. Nonetheless, SY_{mean}-values based on short measuring periods are common. An extensive review of available SY-data in Europe indicated that about half of the considered 1,287 average SY-values measured at gauging stations have a MP < 10 year, while 31% of the data have a MP < 5 year (Vanmaercke et al. 2011b). SY-data derived from reservoir surveys generally cover longer measuring periods. The same literature review indicated that about half of the available 507 average SY-values, derived from reservoir surveys had a MP > 30 year, while only 15% had a MP < 10 year (Vanmaercke et al. 2011b). SY_{mean}-values derived from reservoir surveys with a sufficiently high trapping efficiency also include bedload and are not susceptible to errors due to infrequent sampling. Therefore, they may be expected to give a higher but often more accurate estimate of the total SY_{mean}, compared to SY_{mean}-values measured at gauging stations. As indicated in Fig. 11, uncertainties due inter-annual variability quickly decrease after the first years of monitoring. However, even after 50 years of monitoring, uncertainties are still considerable. This has important implication for our understanding of sediment dynamics and our attempts to model long-term SY_{mean} -values. Many models succeed relatively well in predicting average sediment fluxes based on constant catchment characteristics (e.g. Syvitski et al. 2005; de Vente and Poesen, 2005). However, the relatively high degrees of uncertainty on measured SY_{mean}-data, even after long measuring periods (see Fig. 11), imply that it is impossible for a steady-state model to account for all observed variation in SY, regardless of the quality of the model, input data or SY-measurements. As runoff and rainfall variability control this temporal variability to some extent (see Fig. 7 and 8), models that explicitly consider this variation in runoff and/or climate may be expected to perform

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

better. However, such models face other important challenges, related to accurate process descriptions and input data requirements. Several reviews indicated that temporal (and spatial) explicit process-based models generally do not perform better than temporally lumped empirical models (e.g. Merrit et al. 2003; de Vente et al. 2008; Govers, 2011).

516 517 518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

513

514

515

5 Conclusions and recommendations

This study aimed at quantifying the magnitude of inter-annual variability of annual SY data; identifying factors that control this variability; and assessing the effect of this variability on the reliability of measured average SYdata. Limitations on the available data made it difficult to fully address these research objectives. Firstly, large numbers of SY time series were only available for a few regions, while for many other regions little or no data were available. Also, the considered SY data were collected by various methods which are subjected to various sources of uncertainties. These uncertainties also affect the observed inter-annual variability in SY but their effect on our results could not be assessed. Furthermore, inter-annual variability may be attributable to specific trends, related to the construction of dams and reservoirs, land use changes or climatic changes. Identifying such trends was impossible due to a lack of data and was out of the scope of this research. However, the results of this study are based on a vast dataset of 15,025 annual SY-observations for 726 catchments, representing a wide range of catchment areas, SY-values, environmental conditions and human impacts. Therefore, the results of this study are expected to be representative for the inter-annual variability of measured contemporary sediment fluxes in the USA and major parts of Europe and the Middle East.

Analyses of this large dataset revealed that inter-annual variability in SY is generally considerable, but may differ greatly between catchments (CV_{SY} values ranged between 6 and 313% with a median of 75%). The factors controlling this variability could only partly be identified. Variation in annual runoff as well as rainfall depth explains a part (< 35%) of the observed variability of SY, while catchment area seems of very little importance. Our results remain inconclusive about a potential effect of land use on the inter-annual variability of SY, but

537 indicate only a weak correlation.

> The difficulties to explain inter-annual variability in SY between catchments may be partly attributable to the limitations mentioned above. Furthermore, other factors that were not considered in this study (e.g. catchment geology, distance to potential sediment sources) may contribute to some of the observed variation in inter-annual variability. Nonetheless the results of this and other studies suggest that the inter-annual variability of SY in a catchment is also strongly controlled by the occurrence of extreme events. Further attempts to quantify the interannual variability may therefore benefit strongly from a better understanding about the sensitivity of catchments to such extreme events.

Our lack of understanding about the factors controlling inter-annual variability in SY impedes us to assess catchment-specific uncertainty ranges on average SY-values as a function of their MP due to this inter-annual variability. However, it was possible to statistically calculate robust ranges of these uncertainties, based on the large dataset of time series considered in this study. Fig. 11 can therefore be used to estimate the expected range of uncertainty for SY-values with a known MP.

In general, the results of this study show that uncertainties on average SY-values due to inter-annual variability can be very large, especially when the MP is short (< 5 yr). Furthermore these uncertainties are asymmetrical and have a tendency to underestimate the actual long-term mean SY when measuring periods are short. This 553 asymmetric nature of SY time series has been generally neglected by previous studies. The reliability of average 554 SY quickly improves after the first years of monitoring. However, uncertainty ranges can remain considerably 555 high, even after 50 years of monitoring. As a result, this should be considered in models aiming at predicting the 556 average SY as well as in decision making-strategies. 557 558 Acknowledgements The research described in this paper was conducted within the framework of the EC-DG 559 RTD- 6th Framework Research Programme (sub-priority 1.1.6.3) - Research on Desertification- project DESIRE 560 (037046): Desertification Mitigation and Remediation of land - a global approach for local solutions. M. 561 Vanmaercke received grant-aided support from the Research Foundation - Flanders (FWO), Belgium. We thank 562 the many colleagues for sharing sediment yield data and in particular Kirsti Granlund and Jose Bernal from the 563 Finnish Environment Institute for kindly providing data for various Finnish catchments. Furthermore, this 564 manuscript benefited from the constructive comments of two anonymous reviewers. 565 566 References 567 Abdelali T, Abdesselem M, Aberrezak B (2003) Détermination des dégradation spécifiques dans trois bassins 568 versant des régions mediterraneennes algeriennes. In: Servat E, Najem W, Leduc C, Shakeel A (Eds.) 569 Hydrology of the Mediterranean and Semiarid Regions (Proceedings of an international symposium 570 held at Montpellier, April 2003). IAHS Press, Wallingford, UK, IAHS Publ. 278:366-372 571 Achite M, Ouillon S (2007) Suspended sediment transport in a semiarid watershed, Wadi Abd, Algeria (1973 – 572 1995). J Hydrol 343:187-202 573 Arabkhedri M Valikhojieni A, Hakimkhani S, Charkhabi AH, Telvari A (2004) Estimating and mapping of 574 sediment yield for Iran, Final research report. Soil Conservation and Watershed Management Research 575 Institute, Teheran, Iran 576 Asselman N (2000) Fitting and interpretation of sediment rating curves. J Hydrol 234:228-248 577 Bednarczyk T, Madeyski M (1998) Assessment of suspended load trapped in a small reservoir related to the 578 erosion in a loess basin. In: Summer W, Klaghofer E, Zhang W (eds) Modelling Soil Erosion, Sediment 579 Transport and Closely Related Hydrological Processes (Proceedings of a symposium held at Vienna, 580 July 1998). IAHS Press, Wallingford, UK, IAHS Publ. 249:241-247 581 Beylich AA, Gintz D (2004) Effects of high-magnitude/lowfrequency fluvial events generated by intense 582 snowmelt or heavy rainfall in arctic periglacial environments in northern Swedish Lapland and northern 583 Siberia. Geogr. Ann. 86A: 11–29. 584 Bogen J (2004) Erosion and sediment yield in the Atna river. Hydrobiologia 521:35-47 585 Bogen J, Bønsnes T (2003) Erosion and sediment transport in High Arctic rivers, Svalbard. Polar Res 22:175-586 189 587 Bogen J, Bønsnes T (2005) The impact of hydropower development on the sediment budget of the River 588 Beierelva, Norway. In: Walling DE, Horowitz AJ (Eds.), Sediment Budgets 2 (Proceedings if 589 symposium S1 held during the seventh IAHS Scientific Assembly at Foz do Iguaçu, Brazil, April 2005). 590 IAHS Press, Wallingford, UK, IAHS Publ. 292:214-222

Bonett DG, Seier E (2006) Confidence Interval for a Coefficient of Dispersion in Nonnormal Distributions.

591

592

Biometrical J 48:144-148

593	Casalí J, Gastesi R, Álvarez-Mozos J, De Santisteban LM, Del Valle de Lersundi J, Giménez R, Larrañaga A,
594	Goñi M, Agirre U, Campo MA, López JJ, Donézar M (2008) Runoff, erosion, and water quality of
595	agricultural watersheds in central Navarre (Spain). Agr Water Manage 95:1111-1128

- 596 Cendrero A, Remondo J, Bonachea J, Rivas V, Soto J (2006) Sensitivity of landscape evolution and geomorphic 597 processes to direct and indirect human influence. Geografia Fisica e Dinamica Quaternaria 29:125-137
- Cerdan O, Govers G, Le Bissonnais Y, Van Oost K, Poesen J, Saby N, Gobin A, Vacca A, Quinton J, Auerswald
 K, Klik A, Kwaad F, Raclot D, Ionita I, Rejman J, Rousseva S, Muxart T, Roxo M, Dostal T (2010)
 Rates and spatial variations of soil erosion in Europe: a study based on erosion plot data.
 Geomorphology 122:167–177
- 602 CGIAR (2008) SRTM 90m Digital Elevation Data. Available online: http://srtm.csi.cgiar.org/ (last access: 28 june 2011)
- Close-Lecocq JF, Pissart A, Koch G (1982) Les transports en suspension et en solution de la Meuse à Liège et à
 Tailfer (amont de Namur). Bulletin de la Société géographique de Liège 18:5-18
- Day TJ (1988) Evaluation of long term suspended sediment records for selected Canadian rivers. In: Bordas MP, Walling DE (Eds.), Sediment Budgets (Proceedings of a symposium held at Porto Alegre, December 1988). IAHS Press, Wallingford, UK, IAHS Publ. 174:189-195
- De Casa G, Giglio G (1981) Contribution to the study of the correlation between sediment transport and weathering of the formations in the Arno River Basin. Proceedings of the Florence Symposium, Erosion and sediment transport measurement (22-26 june 1981). IAHS, UK, part 2 (late Papers, Poster Session): 249-256
- de Vente J, Poesen J (2005) Predicting soil erosion and sediment yield at the basin scale: scale issues and semiquantitative models. Earth-Sci Rev 71:95-125
- de Vente J, Poesen J, Bazzoffi P, Van Rompaey A, Verstraeten G (2006) Predicting catchment sediment yield in
 Mediterranean environments: the importance of sediment sources and connectivity in Italian drainage
 basins. Earth Surf Proc Land 31:1017-1034
- de Vente J, Poesen J, Verstraeten G, Van Rompaey A, Govers G (2008) Spatially distributed modelling of soil erosion and sediment yield at regional scales in Spain. Global Planet Change 60:393-415
- Diaconu C (1969) Résultats de létude de lécoulement des alluvions en suspension des rivières de la Roumanie.
 Bulletin of the International Association of Scientific Hydrology 14:51-89
- Djorovic M (1992) Ten-years of sediment discharge measurements in the Jasenica research drainage basin,
 Yugoslavia. In: Walling DE, Davis TR, Hasholt B (Eds.), Erosion, Debris Flows and Environment in
 Mountain Regions (Proceedings of the Chengdu Symposium, July 1992). IAHS Press, Wallingford,
 UK, IAHS Publ. 209:37-40
- 626 EEA (2010) Corine Land Cover 1990 raster data version 13 (02/2010). Available online: 627 http://www.eea.europa.eu/data-and-maps/data/corine-land-cover-1990-raster (last access: 28 june 2011).
- 628 EIE (Elektrik Isleri Etüt Idaresi Genel Müdürlügü) (2005) Unpublished data
- Feyznia S, Majdabadi Farahani F, Mohseni Saravi M,Arabkhedri M (2002) Evaluation of the proper length of record for estimation of mean annual sediment yield and its relation with area, variation of annual sediment yield, climate, geology and vegetation cover. Journal of Agricultural Sciences an Natural Resources 9: 3-16 (in Farsi with English abstract).

634	Finish Environment Institute (2010) Unpublished data
635	FOEN (Federal Office for the Environment) (2008) suspended sediment load data. Published online (last access:
636	27 june 2011). http://www.bafu.admin.ch/hydrologie/01831/01843/02482/index.html?lang=en
637	Gonzales-Hidalgo JC, Batalla RJ, Cerdà A, De Luis M (2009) Contribution of the largest events to suspended
638	sediment transport across the USA. Land Degrad Dev 21:83-91
639	Govers G (2011) Misapplications and Misconceptions of Erosion Models. In: Morgan RPC, Nearing MA (Eds.)
640	Handbook of Erosion Modelling, 1st edition. Blackwell Publishing Ltd, Chichester, UK, pp 117-134
641	Harlow A, Webb B, Walling DE (2006) Sediment yields in the Exe Basin: a longer-term perspective. In: Roward
642	J, Duck J, Werritty A (Eds.), Sediment Dynamics and the Hydromorphology of Fluvial Systems
643	(Proceedings of a symposium held in Dundee, UK, July 2006). IAHS Press, Wallingford, UK, IAHS
644	Publ. 306:12-20
645	Hastings JR (1965) On Some uses of Non-normal coefficients of Variation. J Appl Meteor 4:475-478.
646	Heo J-H, Boes DC, Salas JD (2001) Regional flood frequency analysis based on a Weibull model: Part 1
647	Estimation and asymptotic variances. J Hydrol 242:157-170
648	Hooke RL (2000) On the history of humans as geomorphic agents. Geology 28:843-846
649	Hovius N, Meunier P, Ching-Wei L, Hongey C, Yue-Gau C, Dadson S, Ming-Jame H, Lines M (2011)
650	Prolonged seismically induced erosion and the mass balance of a large earthquake. Earth and Planetary
651	Science Letters 304: 347-355.
652	Hrissanthou V (1988) Simulation model for the computation of sediment yield due to upland and channel
653	erosion from a large drainage basin. In: Bordas MP, Walling DE (eds) Sediment Budgets (Proceedings
654	of the Porto Alegre Symposium, December 1988). IAHS Press, Wallingford, UK, IAHS Publ. 174:453-
655	462
656	INHGA (National Institute of Hydrology and Water Management) (2010) Unpublished data
657	Ionita I (2006) Gully development in the Moldavian Plateau of Romania. Catena 68:133-140
658	Johnson RC (1994) Suspended sediment from two small upland drainage basins: using variability as an indicator
659	of change. In: Olive LJ, Loughran RJ, Kesby JA, Variability in Stream Erosion and Sediment Transport
660	(Proceedings of the Camberra Symposium, December 1994). IAHS Press, Wallingford, UK, IAHS
661	Publ. 224:403-410
662	Kadlec J, Kliment Z, Langhammer J (2007) Evaluation of the ANNAGNPS and SWAT sediment transport
663	models in the Blšanka Catchment, Czech Republic. Proceedings of the COST 634 International
664	Conference on off-site impacts of soil erosion and sediment transport (1-3 October 2007). Czech
665	Technical University in Prague, Faculty of Civil Engineering, Department of Drainage, Irrigation and
666	Landscape Engineering, Prague, pp 145-155
667	Kareiva P, Watts S, McDonald R, Boucher T (2007) Domesticated Nature: Shaping Landscapes and Ecosystems
668	for Human Welfare. Science 316:1866-1869
669	Kertész A (2000) Erosion des versant et transport solides a l'exutoire d'un basin versant en Hongrie. Réseau
670	Erosion Bulletin 20:104-111
671	Kostadinov S, Markovic S (1996) Soil erosion and effects of erosion control works in the torrential drainage
672	basins of southeast Serbia. In: Walling DE, Webb B (eds) Erosion and Sediment Yield: Global and

Finish Environment Institute (2008) Unpublished data

673	Regional Perspectives (Proceedings of the Exeter Symposium, July 1996). IAHS Press, Wallingford
674	UK, IAHS Publ. 236:321-332
675	Maruszczak H, Rodzik J, Świeca A (1992) Mechanical and chemical denudation in the eastern part of the South
676	Polish uplands. In: Kotarby A (Ed.), System Denudacyjny Polski. Polska Akademia NAUK, Instytu
677	Geografii Przestrzennego Zagospodarowania, Warsaw, Prace Geograficzne 155:105-131 (in Polish with
678	English summary)
679	Lenzi MA, Mao L, Comiti F (2003) Interannual variation of suspended sediment load and sediment yield in ar
680	alpine catchment. Hydrolog Sci 48:899-915
681	Lilliefors HW (1967) On the Kolmogorov-Smirnov test for normality with mean and variance unknown. J Am
682	Stat Assoc 62:399–402
683	Lohani AK, Goel NK, Bhatia KKS (2006) Takagi-Sugeno fuzzu inference system for modeling stage-discharge
684	relionship. J Hydrol 331:146-160
685	Markus M, Demissie M (2006) Predictability of annual sediment loads based on flood events. J Hydraul Eng
686	11:354–361
687	Merritt WS, Letcher RA, Jakeman A (2003) A review of erosion and sediment transport models. Environ Model
688	Software 18:761-799
689	Mitchell TD, Carter TR, Jones PD, Hulme M, New M (2004) A comprehensive set of high-resolution grids of
690	monthly climate for Europe and the globe: the observed record (1901-2000) and 16 scenarios (2001-
691	2100). Tyndall Centre for Climate Change Research, Working Paper 55, 30 pp
692	Moatar F, Person G, Meybeck M, Coynel A, Etcheber H, Crouzet P (2006) The influence of contrasting
693	suspended particulate matter transport regimes on the bias and precision of flux estimates. Science of
694	the Total Environment 370:515-531
695	Morehead MD, Syvitski J, Hutton EWH, Peckham SD (2003) Modeling the temporal variability in the flux of
696	sediment from ungauged river basins. Global Planet Change 39:95-110
697	Nordin CF, Meade RH (1981) The flux of organic carbon to the oceans: some hydrologic considerations. In
698	Carbon Dioxide Effects, Research and Assessment Program, Flux of Organic Carbon by rivers to the
699	Oceans, US Dept of Energy, Office of Energy Research, Woods Hole, Massachusetts, USA, pp 173-
700	218.
701	Notebaert B, Verstraeten G, Ward P, Renssen H, Van Rompaey A (2011) Modeling the sensitivity of sediment
702	and water runoff dynamics to Holocene climate and land use changes at the catchment scale
703	Geomorphology 126:18-31
704	Olive LJ, Rieger WA (1992) Stream suspended sediment transport monitoring — why, how and what is being
705	measured? In: Bogen J, Walling DE, Day TJ (eds) Erosion and Sediment Transport Monitoring
706	Programmes in River Basins (Proceedings of the Oslo Symposium, August 1992). IAHS Press
707	Wallingford, UK, IAHS Publ. 210:245-254
708	Ouimet WB, Whipple KX, Royden LH, Sun Z, Chen Z (2007) The influence of large landslides on river incision
709	in a transient landscape: Eastern margin of the Tibetan Plateau (Sichuan, China). GSA Bulletin
710	119:1462-1476
711	Owens PN, Batalla RJ, Collins AJ, Gomez B, Hicks DM, Horowitz AJ, Kondolf GM, Marden M, Page MJ

Peacock DH, Petticrew EL, Salomons W, Trustrum NA (2005) Fine-grained sediment in River

713	Systems: environmental	significance and	managament issues	Divor Dos Appl	21.602 717
/13	Systems: environmentai	significance and	management issues.	River Res Appi 2	21:093-717

- Palsson S, Hardardottir J, Vigfusson GH, Snorrason A (2000) Reassessment of suspended sediment load of river
- Jokulsa a Dal at Hjardarhagi. Report no. OS-2000/070. Orkustofnun, Iceland, 30 pp
- Phillips J (2003) Alluvial storage and the long-term stability of sediment yields. Basin Res 15:153-163
- Phillips JM, Webb BW, Walling DE, Leeks GJL (1999) Estimating the suspended sediment loads of rivers in the LOIS study area using infrequent samples. Hydrol Process 13:1035-1050
- Pont D, Simonnet JP, Walter A (2002) Medium-term Changes in Suspended Sediment Delivery to the Ocean:
 Consequences of Catchment Heterogeneity and River Management (Rhone River, France). Estuar Coast
 Shelf S 54:1-18
- Schäfer J, Blanc G, Lapaquellerie Y, Maillet N, Maneux E, Etcheber H (2002) Ten-year observation of the Gironde tributary fluvial system: fluxes of suspended matter, particulate organic carbon and cadmium. Mar Chem 79:229-242
- 725 SMHI (Swedish Meteorological and Hydrological Institute) (2008) Unpublished data
- Steegen A, Govers G (2001) Correction factors for estimating suspended sediment export from loess catchments.
 Earth Surf Proc Land 26:441–449
- Steegen A, Govers G, Nachtergaele J, Takken I, Beuselinck L, Poesen J (2000) Sediment export by water from
 an agricultural catchment in the Loam Belt of central Belgium. Geomorphology 33:25–36
- 730 Tomkins KM, Humphreys GS, Wilkinson MT, Fink D, Hesse PP, Doerr SH, Shakesby RA, Wallbrink PJ, Blake 731 WH (2007) Contemporary versus long-term denudation along a passive plate margin: the role of 732 extreme events, Earth Surface Processes and Landforms 32: 1013–1031.
- Tote C, Govers G, Van Kerckhoven S, Filiberto S, Verstraeten G, Eerens H (2011) Effect of ENSO events on sediment production in a large coastal basin in northern Peru. Earth Surf Proc Land. doi 10.1002/esp.2200
- Turowski J, Rickenmann D, Dadson JS (2010) The partitioning of the total sediment load of a river into suspended load and bedload: a review of empirical data. Sedimentology 57:1126–1146
- Restrepo JD, Kjerfve B (2000) Magdalena river: interannual variability (1975–1995) and revised water discharge and sediment load estimates. J Hydrol 235:137-149
- Stępniewska S, Stępniewski K (2008) Variability of fluvial transport of the upper Wieprz river. Annals of
 Warsaw University of Life Sciences SGGW Land Reclamation 39:59-68
- Summer W, Klaghofer E, Abi-Zeid I, Villeneuve JP (1992) Critical reflections on long term sediment monitoring programmes demonstrated on the Austrian Danube. In: Bogen J, Walling DE, Day TJ (Eds.), Erosion and Sediment Transport Monitoring Programmes in River Basins (Proceedings of the Oslo Symposium, August 1992). IAHS Press, Wallingford, UK, IAHS Publ. 210:255-262
- Syvitski JPM, Vörösmarty CJ, Kettner AJ, Green P (2005) Impact of Humans on the Flux of Terrestrial
 Sediment to the Global Coastal Ocean. Science 308:376-380
- 748 USGS (2008) Suspended-Sediment Database: Daily Values of Suspended Sediment and Ancillary Data.
 749 Available online: http://co.water.usgs.gov/sediment/ (last access: 27 june 2011)
- Vanmaercke M, Poesen J, Maetens W, de Vente J, Verstraeten G (2011a) Sediment yield as a desertification risk indicator. Sci Total Environ 409:1715-1725

- Vanmaercke M, Poesen J, Vestraeten G, de Vente J, Ocakoglu F (2011b) Sediment yield in Europe: Spatial patterns and scale dependency. Geomorphology 130:142-161
- Vanmaercke M, Zenebe A, Poesen J, Nyssen J, Verstraeten G, Deckers J (2010) Sediment dynamics and the role of flash floods in sediment export from medium-sized catchments: a case study from the semi-arid tropical highlands in northern Ethiopia. J Soils Sediments 10:611-627
- Verstraeten G, Poesen J (2002) Using sediment deposits in small ponds to quantify sediment yield from small catchments: possibilities and limitations. Earth Surf Proc Land 27:1425–1439
- Viers J, Dupré B, Gaillardet J (2009) Chemical composition of suspended sediments in World Rivers: New insights from a new database. Sci Total Environ 407:853-868
- Vörösmarty C, Meybeck M, Fekete B, Sharma K, Green P, Syvitski J (2003) Anthropogenic sediment retention: major global impact from registered river impoundments. Global Planet Change 39:169–190
- Walling DE (1984) The Sediment Yield of African Rivers. In: Walling DE, Foster SSD, Wurzel P (eds)
 Challenges in African Hydrology and Water Resources (Proceedings of the Harare Symposium, July
 1984). IAHS Press, Wallingford, UK, IAHS Publ. 144:265-283
- Walling DE (1999) Linking land use, erosion and sediment yields in river basins. Hydrobiologia 410:223–240
- Walling DE (2006) Human impact on land–ocean sediment transfer by the world's rivers. Geomorphology 768 79:192–216
- Walling DE, Fang D (2003) Recent trends in the suspended sediment loads of the world's rivers. Global Planet
 Change 39:111–126
- Walling DE, Kleo A (1979) Sediment yields of rivers in areas of low precipitation: a global view. Hydrology of
 Areas of Low Precipitation (Proceedings of a Symposium Held during the XVII Assembly of the
 International Union of Geodesy and Geophysics at Canberra, December 1979), pp 479–493
- Walling DE, Owens PN, Leeks GJL (1998) The role of channel and floodplain storage in the suspended sediment budget of the River Ouse, Yorkshire, UK. Geomorphology 22: 225-242.
- Walling DE, Webb BW (1981) The reliability of suspended load data. In: Erosion and Sediment Transport
 Measurement (Proceedings of the Florence Symposium, 22-26 June 1981). IAHS Press, Wallingford,
 UK, IAHS Publ. 133:177–194
- Walling DE, Webb BW (1988) The reliability of rating curve estimates of suspended sediment yield: some further comments. In: Bordas MP, Walling DE (Eds.), Sediment Budgets (Proceedings of a symposium held at Porto Alegre, December 1988). IAHS Press, Wallingford, UK, IAHS Publ. 174:337-350
- Ward PJ, van Balen RT, Verstraeten G, Renssen H, Vandenberghe J (2009) The impact of land use and climate change on late Holocene and future suspended sediment yield of the Meuse catchment. Geomorphology 103:389–400
- Webb BW, Phillips JM, Walling DE, Littlewood IG, Watts CD, Leeks GJL (1997) Load estimation methodologies for British rivers and their relevance to the LOIS RACS(R) programme. Sci Total Environ 194–195:379–389
- Weibull W (1951) A statistical distribution function of wide applicability. J Appl Mech ASME 18:293–297

TABLES AND FIGURES

Country	Sources	# catchments with SY-data	# annual SY- observations	# catchments with corresponding runoff data	# annual runof discharge observations
Algeria	Abdelali et al., 2003	3	30	-	-
	Achite and Ouillon, 2007	1	22	1	22
Belgium	Close-Lecocq et al., 1982	1	20	1	20
Czech Rpublic	Kadlec et al., 2007	1	10	-	-
Finland	Finnish Environment Institute, 2008	27	420	-	-
	Finnish Environment Institute, 2010	15	345	15	345
France	Pont et al., 2002	1	30	1	30
	Schäfer et al., 2002	2	20	2	20
Germany	Hrissanthou, 1988	1	12	-	-
Hungary	Kertész, 2000	1	17	-	-
Iceland	Palsson et al., 2000	1	35	1	35
Iran	Arabkhedri et al., 2004	123	3643	37	1107
Italy	De Casa and Giglio, 1981	4	44	-	-
	Lenzi and Comiti, 2003	1	16	-	-
Norway	Bogen, 2004	2	29	2	29
Norway (Svalbard)	Bogen and Bønsnes, 2003	1	12	-	-
Poland	Bednarczyk and Madeyski, 1998	1	22	-	-
	Maruszczak et al., 1992	4	34	-	-
	Stepniewska and Stepniewski, 2008	1	11	1	11
Romania	Diaconu, 1969	2	19	2	19
	INHGA, 2010	67	2647	61	2393
Serbia	Kostadinov and Markovic, 1996	1	9	-	-
	Djorovic, 1992	1	10	1	10
Spain	Casali et al., 2008	2	14	-	-
Sweden	SMHI, 2008	29	531	28	511
Switzerland	FOEN, 2008	13	175	-	-
Turkey	EIE, 2005	116	2746	107	2580
United Kingdom	Walling and Webb, 1988	1	10	-	-
•	Harlow et al., 2006	3	38	2	20
U.S.A.	USGS, 2008	300	4054	296	4021
Total		726	15025	558	11173

Table 1 Overview of the selected annual sediment yield (SY) time series per country. For each source, the number of catchments and corresponding sum of annual SY observations is indicated, as well as the number of catchments and observations for which also the corresponding annual runoff discharge data were available.

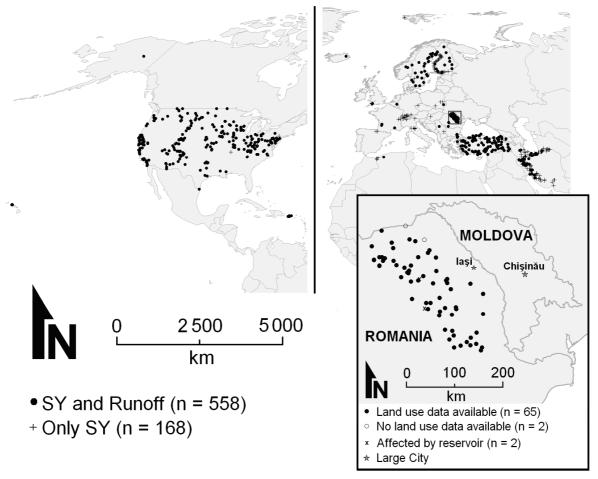


Fig. 1 Location of all river gauging stations having at least seven years of annual sediment yield (SY) data, considered in this study. Black dots indicate gauging stations for which also the annual runoff depths corresponding to the annual SY are available. Crosses mark gauging stations for which no runoff data are available. Subcatchments of the Siret Basin (Romania) for which land use data are available are shown in the inset

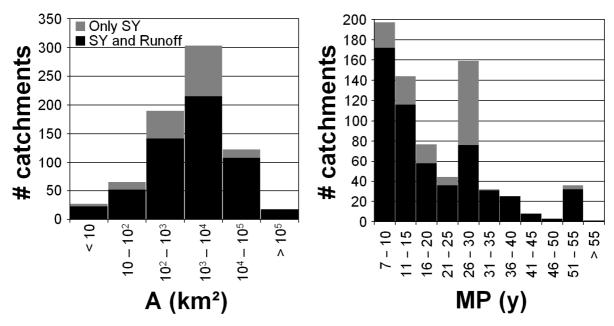


Fig. 2 Frequency distribution of all catchments considered in this study, according to their catchment area (A; left) and measuring period (MP; right). The number of catchments ('#') in each class for which both annual runoff and sediment yield (SY) data are available is indicated in black. The number of catchments for which only annual SY-data are available, is indicated in grey

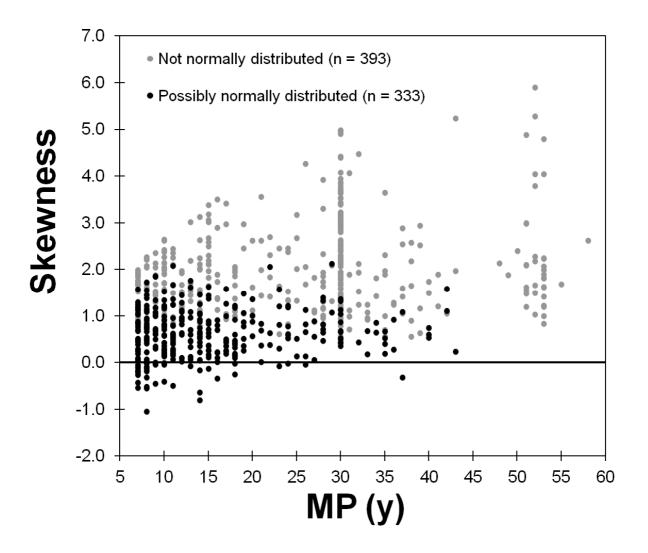


Fig. 3 Skewness of all annual sediment yield time series according to their measuring period (MP). Time series indicated in black were found to be normally distributed, according to a Lilliefors test at a significance level of 0.05

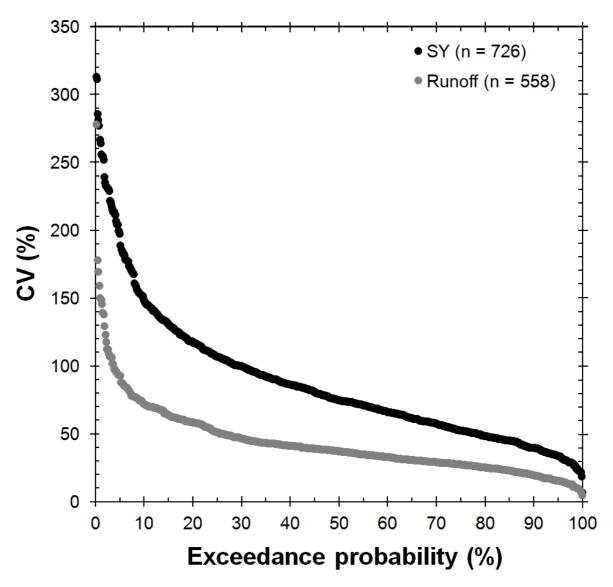


Fig. 4 Exceedance probality of the coefficient of variation (CV) for all available annual sediment yield (SY) and runoff depth (Runoff) time series

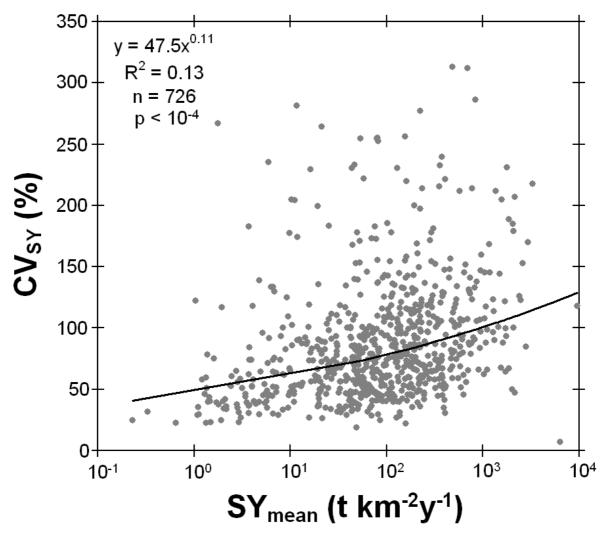


Fig. 5 Mean annual sediment yield (SY_{mean}) versus the coefficient of variation of the annual sediment yield values (CV_{SY})

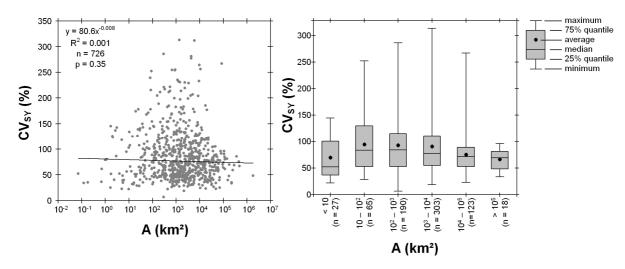


Fig. 6 Left: Catchment area (A) versus the coefficient of variation of the annual sediment yield values (CV_{SY}). The regression is insignificant at a confidence level of 5%. Right: Boxplots of the CV_{SY} for different ranges of catchment areas

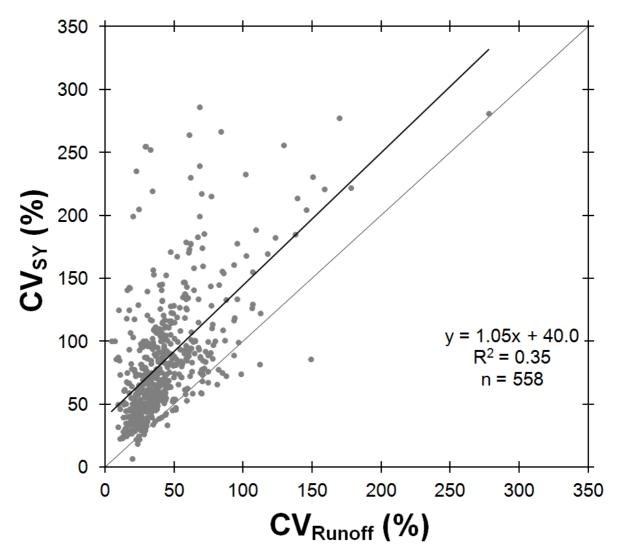


Fig. 7 Coefficient of variation of the annual SY-values (CV_{SY}) versus the coefficient of variation of the corresponding annual runoff depth values (CV_{Runoff})

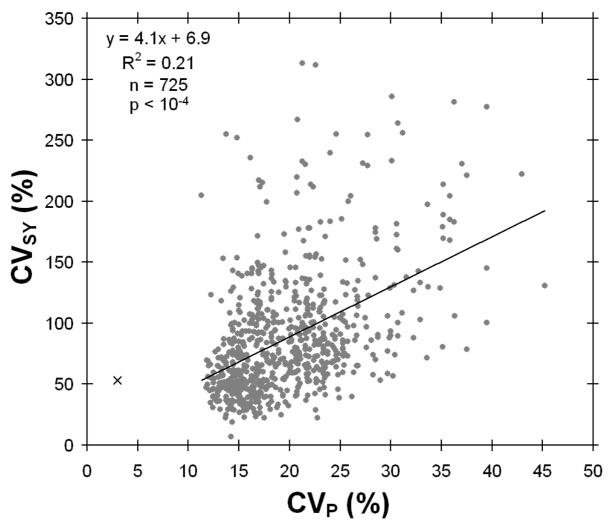


Fig. 8 Coefficient of variation of the annual sediment yield values (CV_{SY}) versus the estimated coefficient of variation of annual rainfall of each catchment (CV_P) . The value indicated by a cross was excluded from the regression, since its corresponding CV_P was expected to be unreliable (see text)

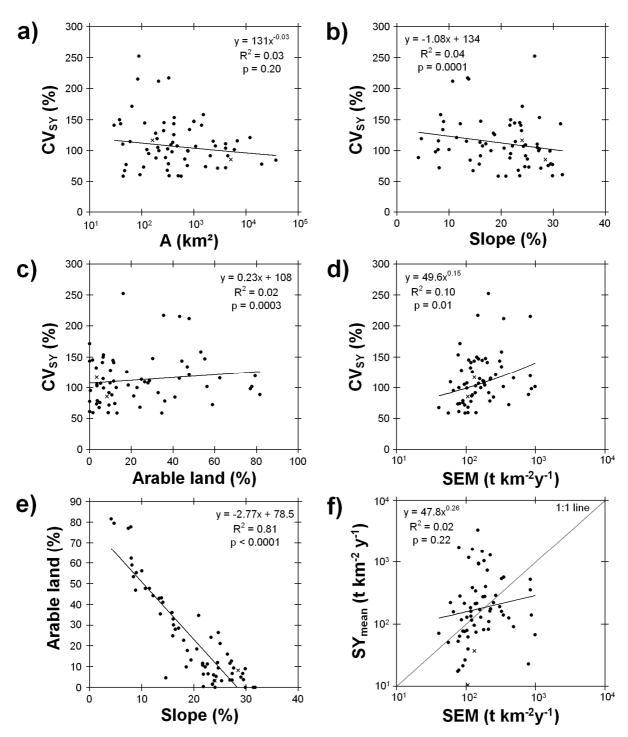


Fig. 9 Relationships between the coefficients of variation of annual sediment yield (CV_{SY}) and various catchment characteristics for 65 subcatchments of the Siret basin in Romania (see Fig. 1). The two catchments indicated with an 'x' are affected by dams and were not included in the regression analyses. All regressions are therefore based on 63 observations (representing 2477 catchment-years of observations). A: catchment area; Slope: estimated average slope of the catchment; Arable land: estimated aerial fraction of arable land; SEM: estimated average sheet and rill erosion rate according to the map of Cerdan et al. (2010); SY_{mean} : average annual sediment yield for the whole measuring period

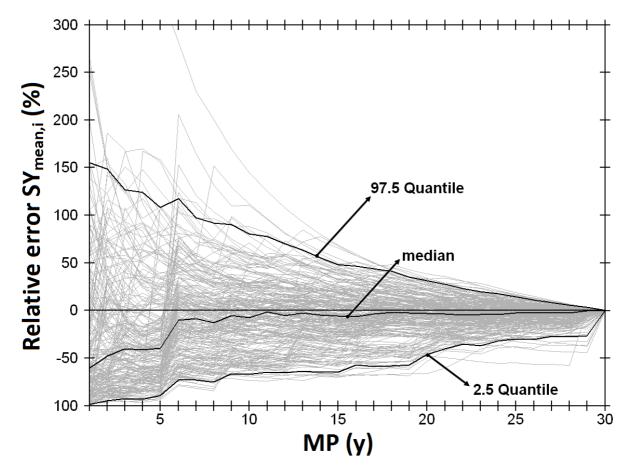


Fig. 10 Relative error of the average annual sediment yield (SY) for the indicated measuring period (Relative error $SY_{mean,i}$) versus the measuring period (MP) for all catchments with at least 30 years of annual SY observations (n = 226). Relative errors were calculated according to Eq. 2. Each grey line represents one catchment. The black lines correspond to the 2.5%, 50% and 97.5% quantiles of the relative errors for the indicated MP, based on all considered catchments

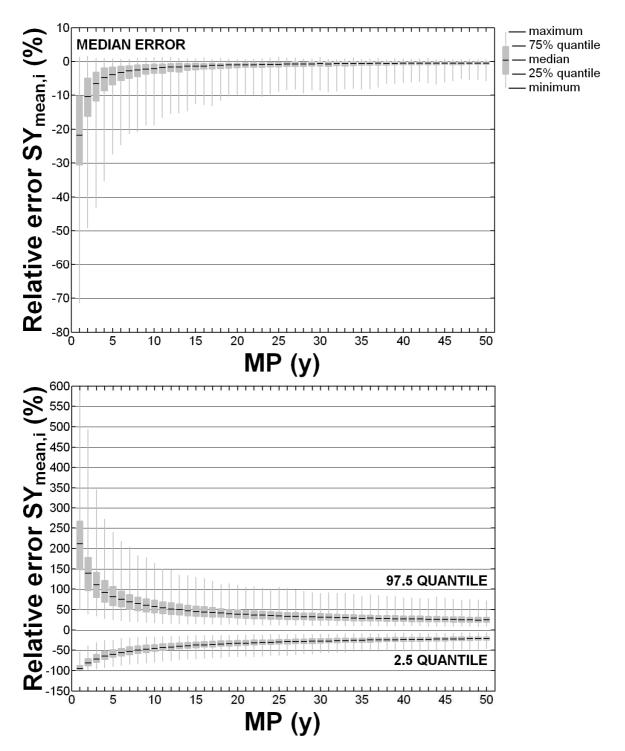


Fig. 11 Simulated relative errors on the average annual sediment yield (SY) for the indicated measuring period (MP; see Eq. 5). Each boxplot in the **top** figure display the distributions of the expected median relative errors for all considered catchments (n = 202; see text), corresponding to the indicated MP. The boxplots in the **lower** figure display the corresponding distribution of the lowest and highest 2.5% of the simulated errors and indicate a 95% probability interval of the relative errors